



Wood burning fires and stoves

2025



 Dik Geurts

Lovers of the real wood fire

The name Dik Geurts has been synonymous with craftsmanship and design ever since the company was founded, and over the past 40 years it has become a household name in the fireplace world. Since 2007 Dik Geurts has been fully integrated in DRU Verwarming B.V., an innovative company that has guaranteed top quality for centuries.

In addition to being designers, we at Dik Geurts are particularly fond of the real wood fire. In our factory in Duiven, The Netherlands, we work hard every day on the quality and ease of operation of our stoves and fires. With this brochure, we would like to show you how the combination of simplicity, experience and knowledge leads to beautiful fires and the most beautiful flames.

Dik Geurts is a trademark of DRU Verwarming B.V.



Scan the QR code and watch the DRU corporate video



ENVIRONMENT Wood firing and aeration	4
WOOD STOVE TECHNOLOGY Ingenious technology, simple to use	8
DESIGN FIRES 2-Sided, Front and Tunnel	10
WOOD AND MULTI-FUEL STOVES 3-Sided and Front	24
INSERT AND BUILT-IN FIRES Front (including fires with fan), Tunnel, 2-sided and 3-sided	44
CONNECTION OPTIONS Insert- and built-in fires	60
CENTRAL HEATING FIRES Front	62
TECHNICAL DATA Dimensions and characteristics	64

Icons used



kW | Output
Page 6



EA | External Air
Page 7



IR | Infrared
Page 9



RS | Room Sealed
Page 7



DG Smart Assist
Page 8

Dik Geurts

Creation of flames



Scan the QR code and experience the passion of Dik Geurts wood fires.



Save on wood,
fine dust and
the environment



All wood burning stoves and fires in the Dik Geurts range have a particularly high efficiency. A higher temperature is reached in these closed and clever woodburners, and as a result combustion is much more complete and efficient. Even residual soot particles are fully burned, so you save on wood, emit less particulate matter and soot particles, and thus protect the environment.

Ready for the future with EcoDesign

Since 1 January 2022, European legislation sets requirements for the minimum required efficiency of a stove and the maximum allowed emission of particulate matter. All Dik Geurts fireplaces and stoves comply with this legislation and carry the EcoDesign 2022 label. Several Dik Geurts fires and stoves are also Defra approved. For the right purchase, choose an environmentally friendly Dik Geurts wood stove for now and in the future.




Climate neutral

In principle, heating with wood is CO₂ neutral. During the growth phase of a tree, CO₂ is absorbed from the air. When the tree is cut down and burned, the same amount of CO₂ is released into the atmosphere. In order to be able to remain climate neutral, sustainably sourced wood must be used. Therefore a new tree is planted for every tree that is cut down. This process ensures everything remains nicely in balance.

Energy label

The Dik Geurts wood burning stoves are provided with an energy efficiency label. The greener the label, the better it is for the environment. Our stoves are all in the A-class or better.

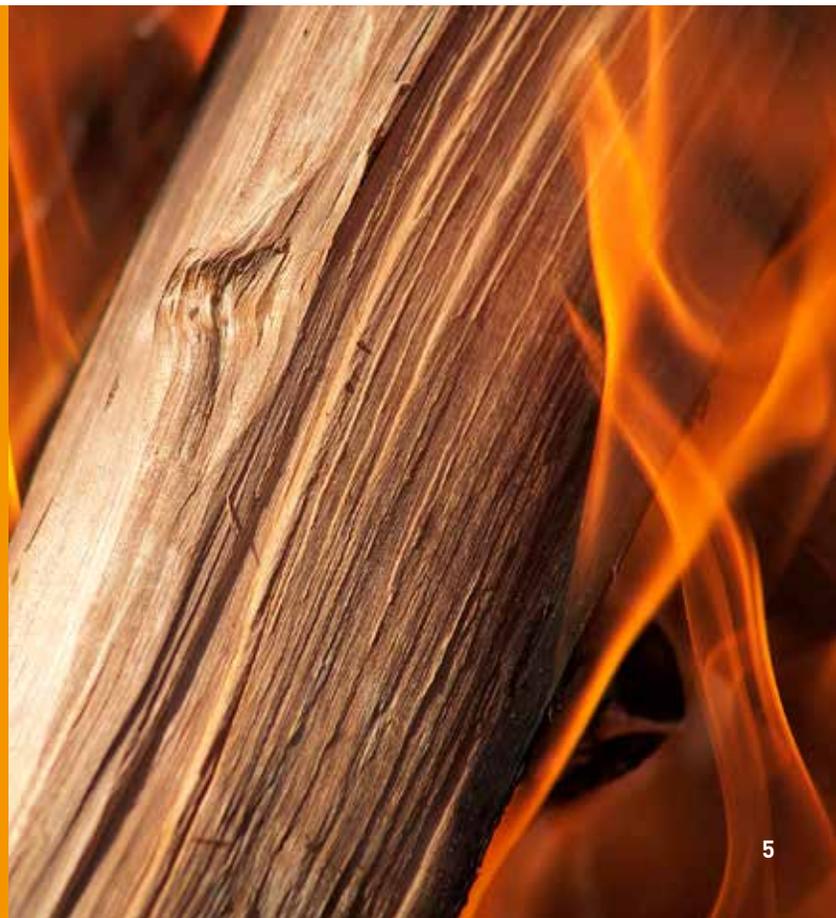

The right way to burn

The best setup

With the so-called **'Swiss method'** you can burn wood safely and cleanly. At the bottom of the stove you should place large logs, on top of which you should put small pieces of wood, and on top of those, firelighters. Replenish the heating space when all that is left is a glow bed. Place a number of logs with the cleft side down in the fire box and open the air supply.

The right wood

The fuel must be sufficiently dry and suitable as firewood. Good firewood has a moisture percentage of 15%-20%. You should never burn waste wood such as chipboard or old railway sleepers, or treated wood. The combustion of waste or treated wood can produce toxic fumes. As well as being unsafe, this is also very harmful to the environment.



Scan the QR code for an explanation video about burning wood.

A Dik Geurts wood stove always has a high efficiency, low emissions of CO and fine dust and ultimate fire control. Guaranteed.

The right output

The output of a wood burning fire or stove must match the space you want to heat. If you have a fire with too much output, the room will soon become too hot. You will then not be able to let the fire burn to its full capacity and this can cause odour nuisance or extra pollution of the chimney. If the power is too low, you run the risk that the fire will not heat the room enough. This is especially annoying when the fire has an important function in the heating of your home. Dik Geurts offers a wide range of stoves and fires for larger and smaller rooms. Because Dik Geurts fires can also be fired at low power (4 kW), they are extremely suitable for use in spring or autumn.



kW (Output, indicated in kilo Watt).

Fireplaces with outdoor air connection

Houses today are increasingly well insulated. To ensure that enough fresh air still enters the home, ventilation systems are often installed. It is therefore important to consider the supply air for combustion when choosing your fireplace. For instance, you can get the supply air from the setup room, but also from outside. To get the supply air for wood combustion from outside, it is important to equip a wood fire with an outside air connection. We distinguish between:



EA ('External Air'), standard

- used in neutral or overpressure situations
- with the EA kit, oxygen for combustion can come almost entirely from outside
- possible for all fireplaces



RS ('Room Sealed')

- used in low pressure situations in the living space
- oxygen for combustion comes entirely from outside
- Included with a large number of fireplaces


Modern homes choose RS

RS wood-burning fireplaces are often installed in modern, passive and gap-tight homes. Before delivery, these fireplaces are tested for leak-tightness and provided with a certificate. Optimally suited for a balanced indoor climate and optimum heating pleasure.



Calculate output

Calculate the content of the space you want to heat (length x width x height). Next, it is important to get an idea of the extent to which your house is insulated. For example, do you have double-glazing and wall and floor insulation everywhere? Then your home belongs to type A. Is your home not optimally insulated, without double-glazing in every window? Then your home belongs to type B. Is your home poorly insulated and with no double-glazing? Then your home belongs to type C. Knowing this you can see in the graph below what capacity (in kilowatts) is needed to heat your home.

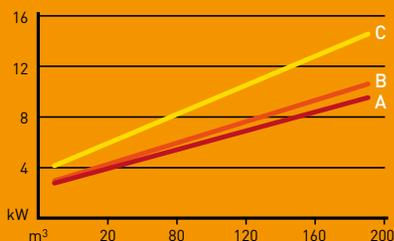

Warm heart for Uganda

At Dik Geurts we care for the world around us, and human beings also deserve our attention. In our project 'A fireplace for you, a future for her', part of the proceeds from our fires is used to provide women in Uganda with a microcredit for a tree plantation.



Thoughtful technique, simple to use



A Dik Geurts wood stove is not just a cabinet in which you can burn wood. It is a thoughtfully-designed device that ensures efficient and clean combustion at a high efficiency. Our fires and stoves have a closed combustion chamber (so no grate) that provides good insulation, and the flue gases that are released during combustion are led outside via an ingenious labyrinth.

Infrared glass

At Dik Geurts we use infrared glass for a number of our fires and stoves to circulate the heat in the fire box. This gives a higher efficiency, retains the heat in the fire and as a result the glass stays clean much longer.



IR (Infrared)

Vermiculite

The combustion chambers of all Dik Geurts fires are insulated with heat-retaining natural vermiculite. For a nice contrast with the yellow flames, the vermiculite in the combustion chamber of our Design fires is coloured dark anthracite.

Floor plates

For a complete set-up and extra protection of the floor, we offer round, rectangular and square floor plates. Finished in dark anthracite steel and available in different sizes.



Optional floor plate

Simple operation



DG Smart Assist

Automatic control

Always enjoy perfect combustion with DG Smart Assist. This smart system lets you easily control your wood fire via a smartphone or tablet. With automatic air control and wood refill notifications. DG Smart Assist makes burning wood easy, efficient and environmentally friendly.

Control via app on smartphone or tablet

- Automatic air slide
- Select flame height and heat output
- Temperature sensor controls the air supply
- Always refill at the right time (saving on wood)
 - Notification via smartphone or tablet
 - Sound alert via wood stove
- Always an optimal restart

Available on Dik Geurts wood stoves:

- Vidar Triple series (Small-Medium-Wall)
- Folke
- Orbe

Available on other Dik Geurts fireplaces soon..



Watch the DG Smart Assist video

Simple operation: just one lever



Manual control

Dik Geurts fires and stoves are easy to operate. They have a single lever to regulate the surprisingly sophisticated air supply. Thanks to this, Dik Geurts fires and stoves ignite very easily.

Design fires

The eye-catcher
for every interior





A design fire gives your home character and can be the beating heart of any interior. The Dik Geurts design fires can seem to float in space and at the same time form a natural unity with the rest of the room.

Page
12



ODIN FRONT

Base
Fixed
Plateau
Wall

Page
14



ODIN TUNNEL

Base
Fixed
Plateau

Page
16



OVAL FRONT

Base
Fixed
Legs
Plateau
Wall

Page
18



OVAL TUNNEL

Base
Fixed
Legs
Plateau

Page
20



BORA CORNER

Cubes
Fixed
Floating Plateau
Straight Plateau
Wall

Odin

Function and design go hand in hand perfectly

The unique, round design not only makes the Odin a real eye-catcher, but its shape also makes for a great flame picture.

- Faster warmth while environmentally friendly
- Unique round glass window
- Hanging from the ceiling or on the wall or standing on a plateau or robust base



Base with external air connection



Odin Front, Fixed

Efficiency 75,2% **A**
WxDxH 606x380x606 mm



Odin Front, Wall

Efficiency 75,2% **A**
WxDxH 606x415x606 mm



Odin Front, Base

Efficiency 75,2% **A**
WxDxH 606x600x940 mm



Scan the QR code for a preview



Odin Front, Plateau

Efficiency 75,2% **A**
WxDxH 1600x380x842 mm



4-8 kW



EA



Scan the QR code
for a preview



Odin Tunnel, Fixed

Efficiency 75,0% **A** →
WxDxH 606 x 400 x 606 mm

 
6-10 kW EA



Scan the QR code
for a preview



Ultimate fire
experience with
two-way visibility
and warmth



Odin Tunnel, Base

Efficiency 75,0% **A**
WxDxH 606 x 600 x 940 mm



6-10 kW EA

Odin Tunnel, Plateau

Efficiency 75,0% **A**
WxDxH 1600 x 400 x 842 mm



6-10 kW EA



Oval

The new style of heating

Typical Dik Geurts is this design fireplace with its oval shape. The various placement options make the Oval suitable for any interior.

- Beautiful fire view due to oval shape
- Unique air slide for easy control of flame intensity
- Wall-mounted, free hanging from the ceiling or standing on a plateau, robust base or legs



Base with external air connection



Oval Front, Base

Efficiency 75,9% **A**
W x D x H 980x380x944 mm




Oval Front, Fixed

Efficiency 75,9% **A**
W x D x H 980x380x606 mm




Oval Front, Plateau

Efficiency 75,9% **A**
W x D x H 2000x380x838 mm



Oval Front, Wall

Efficiency 75,9% **A**
W x D x H 980x380x606 mm





Scan the QR code
for a preview

Oval Front, Legs

Efficiency 75,9% **A**
W x D x H 980x474x926 mm


6-10 kW


EA


RS





Oval Tunnel, Fixed

Efficiency 81,5% **A+**
W x D x H 980x380x606 mm



9-12 kW



IR



EA



RS



Scan the QR code
for a preview



Unique design
and a beautiful fire
from two sides

Oval Tunnel, Base

Efficiency 81,5% **A+**
W x D x H 980x380x944 mm



Oval Tunnel, Plateau

Efficiency 81,5% **A+**
W x D x H 2000x380x838 mm



Oval Tunnel, Legs

Efficiency 81,5% **A+**
W x D x H 980x474x926 mm



Bora Corner

Robust cube with double-sided fire view

The two-sided glass window of the Bora Corner design fires gives a beautiful fire view. Hanging in the room or standing on a plateau, the Bora provides warmth and atmosphere throughout the area.

- Choose a left or right version
- Design fireplace for any position in the house
- Wide output range, optimally adjustable

Bora Corner, Cubes

Efficiency 78,1% **A**
WxDxH 625x577x1030 mm



4-9 kW



IR



EA



RS



Scan the QR code for a preview



Bora Corner, Fixed

Efficiency 78,1% **A**
 WxDxH 505x410x510mm



4-9 kW

IR

EA

RS



Scan the QR code
for a preview



Bora Corner, Floating Plateau

Efficiency 78,1% **A**
 WxDxH 1200x450x829mm



4-9 kW

IR

EA

RS



Scan the QR code
for a preview





Scan the QR code for a preview

Bora Corner, Straight Plateau

Efficiency 78,1% **A**
WxDxH 1500x450x879 mm



4-9 kW




IR



EA



RS

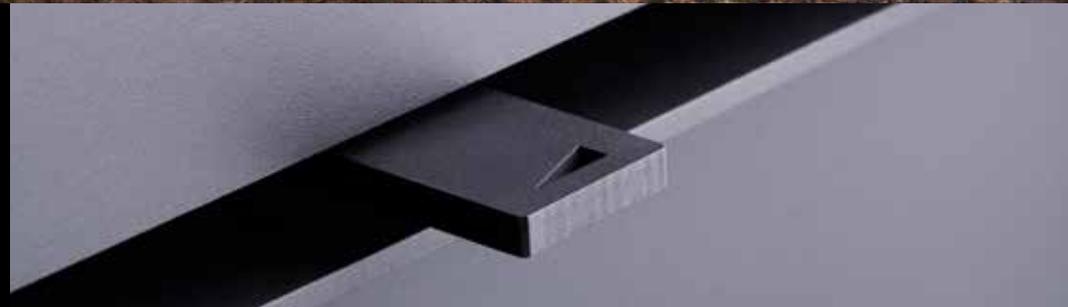

Plateau for wood storage is available in different sizes



Bora Corner, Wall

Efficiency 78,1% **A**

WxDxH 505x448x510mm



4-9 kW



IR



EA



RS



Scan the QR code
for a preview

Wood and multi-fuel stoves

Height of
atmosphere
and warmth

A long gaze into dancing flames, the cosy sound of a real crackling fire and the warmth from a natural source. With a Dik Geurts wood fire you bring the old-fashioned cosiness of a campfire to your living room.

Page
26



VIDAR TRIPLE
Small-Medium-Large
Store
Floating Plateau
Straight Plateau
Wall

Page
30



KALLE

Page
31



FOLKE

Page
32



MODIVAR 5
Store Front
Store Corner
Floating Plateau
Straight Plateau

Page
33



ORBE

Page
34



SOREN 5

Page
34



ASTE 5

Page
35



LARS 1000

Page
36



IVAR
5, Low
5, High
5, Store
8, Low
8, Store

Page
42



JANNIK
Medium, Low
Medium, High
Large

Vidar Triple

A stove to suit any home

Vidar stoves come in several shapes and sizes. There is always a suitable stove to suit your home.

- Freestanding with log compartment, standing on a plateau or wall-mounted
- Fits any room with a choice of 3 sizes
- Automatic control via smartphone or tablet
- Fitted with IR (infrared) side windows for extra-clean glass
- Optional elevated ash threshold



Vidar Triple Medium, Floating Plateau

Efficiency 76,3% **A**
W x D x H 1200x450x835 mm



Vidar Triple Medium, Straight Plateau

Efficiency 76,3% **A**
W x D x H 1500x450x885 mm



Vidar Triple Medium, Wall

Efficiency 76,3% **A**
W x D x H 662x430x535 mm



Scan the QR code for a preview



Vidar Triple Medium, Store

Efficiency 76,3% **A**
WxDxH 662x410x850 mm



4-9 kW



IR



EA



RS



DG
Smart
Assist



Scan the QR code
for a preview



Vidar Triple Large, Wall

Efficiency 79,0% **A**
 W x D x H 800 x 430 x 535 mm



Scan the QR code for a preview

Vidar Triple Large, Store

Efficiency 79,0% **A**
 W x D x H 800 x 410 x 850 mm



Vidar Triple Large, Straight Plateau

Efficiency 79,0% **A**
 W x D x H 1500 x 450 x 885 mm



More space,
 modern style,
 efficient heat



Scan the QR code for a preview



Vidar Triple Small, Wall

Efficiency 79,0% **A**
 WxDxH 500x380x535 mm

- 4-7 kW
- IR
- EA
- RS
- DG Smart Assist



Scan the QR code for a preview

Vidar Triple Small, Store

Efficiency 79,0% **A**
 WxDxH 500x360x850 mm

- 4-7 kW
- IR
- EA
- RS
- DG Smart Assist



Vidar Triple Small, Floating Plateau

Efficiency 79,0% **A**
 WxDxH 1200x450x835 mm

- 4-7 kW
- IR
- EA
- RS
- DG Smart Assist



Vidar Triple Small, Straight Plateau

Efficiency 79,0% **A**
 WxDxH 1500x450x885 mm

- 4-7 kW
- IR
- EA
- RS
- DG Smart Assist



Scan the QR code for a preview

Kalle

Extra large
windows for
optimum
fire view

The Kalle is an industrial wood burning stove with a handy wood compartment under the fire box. The three large windows provide a magnificent view of the flames.

- Tight freestanding wood burning stove with wood storage
- Fire view from three sides
- Economical in use due to very high efficiency (85%)



Kalle

Efficiency
WxDxH

85,0%

A+ →

546x415x1000 mm



4-8 kW



EA

Folke



Scan the QR code
for a preview



Folke

Efficiency 77,3% **A**
WxDxH 476 x 410 x 1000 mm



4-8 kW



IR



EA



RS



DG
Smart
Assist

Thanks to the Folke's three-sided fire view, you can enjoy the lively flames even more. The wood compartment underneath the fire box gives this stove a rustic and atmospheric look, even when the stove is not burning.

- Unique air slide
- Automatic control via smartphone or tablet
- Heat reflective (infrared) side windows
- Optional kit for self-closing door
- Suitable for mechanically ventilated and passive houses

Atmospheric,
even when
the stove is
not burning

Modivar 5

Tight shapes and ultimate fire control

Thanks to their sleek shapes and dark steel, Modivar stoves are ideal for a modern interior. If you are looking for something really special then a floating plateau is worth it.

- Ultimate fire control thanks to simple air slide
- Integrated door handle
- Choice of wood compartments and plateaus

Modivar 5, Store Corner

Efficiency 82,0% **A+**
WxDxH 450 x 368 x 1000 mm



Scan the QR code for a preview



Modivar 5, Floating Plateau

Efficiency 82,0% **A+**
WxDxH 1200x450x857 mm



Modivar 5, Straight Plateau

Efficiency 82,0% **A+**
WxDxH 1500x450x907 mm



Modivar 5, Store Front

Efficiency 82,0% **A+**
WxDxH 450 x 368 x 1000 mm





Scan the QR code
for a preview



Orbe

Efficiency
WxDxH

81,6%

A+

480x480x1052 mm



5-9 kW



EA



RS



DG
Smart
Assist



Orbe

The perfect
mix of warmth
and design

The Orbe is a modern, freestanding wood stove that fits perfectly into both classic and contemporary interiors. The combination of an integrated door handle and premium finish creates a luxurious look.

- Robust cast-iron door
- Automatic control via smartphone or tablet
- Matching steel floor plate
- Optional kit for self-closing door
- Suitable for mechanically ventilated and passive houses

Aste 5 & Soren 5

Woodburning stove with rural countryside look

The Aste 5 and Soren 5 have a sturdy appearance with crisp lines and plenty of fire visibility. It is easy to install in an existing situation. The cast-iron door and the classic legs give the stove a robust appearance.

- Ideal for placing in an existing fireplace
- Chimney connection only 10 cm from the back
- Stylish door handle



Aste 5

Efficiency 82,0% **A+**
W x D x H 486 x 350 x 555 mm
Available with multi-fuel kit.



 **4,9-7 kW**  **EA**  **RS**




Scan the QR code for a preview

Soren 5

Efficiency 82,0% **A+**
W x D x H 450 x 350 x 570 mm
Available with multi-fuel kit.

 **4-7 kW**  **EA**  **RS**

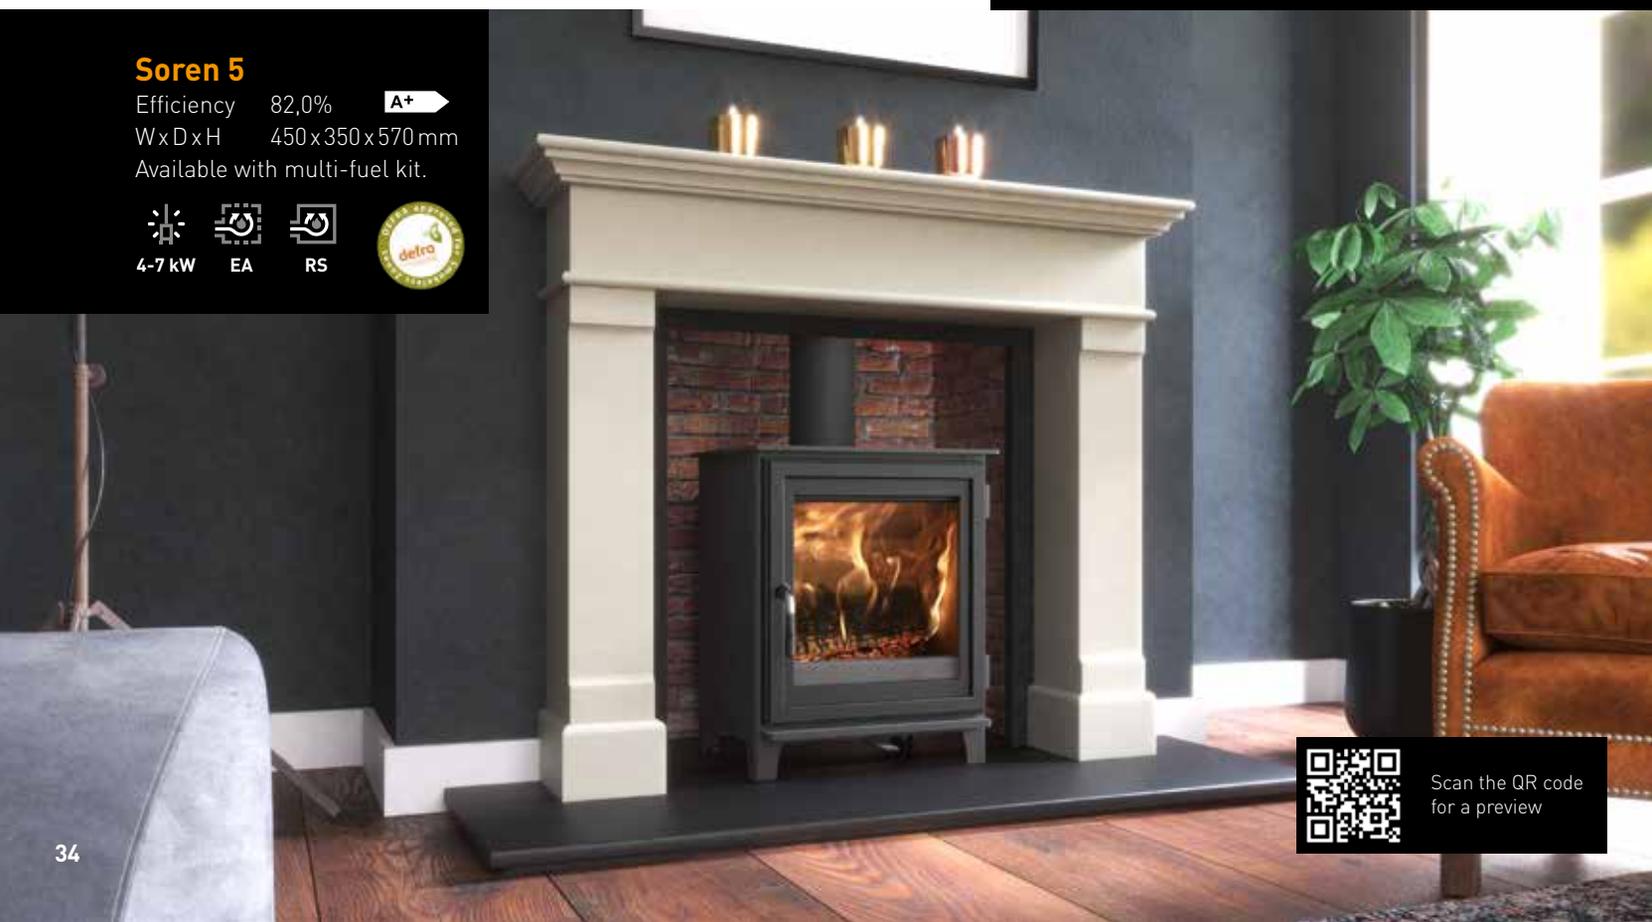

Scan the QR code for a preview

Lars 1000



Scan the QR code
for a preview

Atmosphere, heat and slow-cooking

Above the glass window of the Lars 1000 wood burning stove there is a room that can be used as an oven. This stove offers atmosphere, warmth and also the possibility to prepare simple dishes.

- Unique oven at the top of the stove
- High efficiency
- Low particulate emissions thanks to high-quality combustion

Lars 1000

Efficiency 82,0% **A+**
WxDxH 448 x 348 x 1000 mm



4,9-7 kW



EA



RS



Ivar 5

Versatile source of atmosphere for the real enthusiast

The Ivar series is recognisable by the sleek cast iron door that offers a full view of the flames. Ivar stoves combine a compact and stylish appearance with the technically advanced combustion process for which Dik Geurts is known.

- Removable 'cold' handle
- Suitable for installation in existing spaces
- Wide output range & extremely low emissions





Ivar 5, Low

Efficiency 82,0% **A+**
WxDxH 450x350x555 mm
Available with multi-fuel kit.

  
4,9-7 kW EA RS





Ivar 5, High

Efficiency 82,0% **A+**
WxDxH 450x350x660 mm
Available with multi-fuel kit.



4,9-7 kW EA RS



Cast iron door with
removable handle





Ivar 5, Store

Efficiency 82,0% **A+**
WxDxH 450x350x850 mm
Available with multi-fuel kit.

  
4,9-7 kW EA RS



Ivar 8



Ivar 8, Low

Efficiency 76,6% **A** →
WxDxH 540x350x555 mm
Available with multi-fuel kit.

5-10 kW EA RS



Scan the QR code
for a preview



Scan the QR code
for a preview



Ivar 8, Store

Efficiency 76,6% **A**
WxDxH 540x350x850 mm
Available with multi-fuel kit.



5-10 kW




EA



RS



Large glass
window with wide
view of the fire

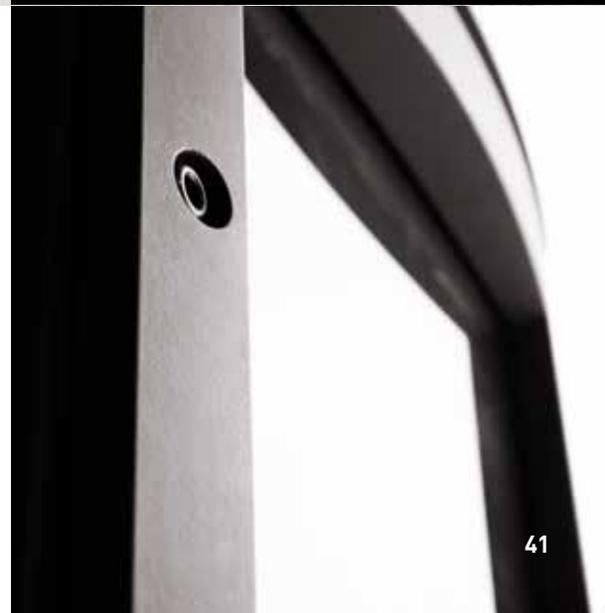

Jannik

Strikingly beautiful details, typically Dik Geurts

With the stoves in the Jannik series you recognise the robust details that are typical for the designs of Dik Geurts. Clean lines, sturdy hinges and a unique, slim handle. This handle provides easy access to the inside of the stove.

- Unique handle
- Wide power range
- Economical firing due to high efficiency of 87%



Jannik Medium, High

Efficiency 82,0% **A+**
WxDxH 550x375x900 mm



Jannik Medium, Low

Efficiency 82,0% **A+**
WxDxH 550x375x680 mm






Jannik Large

Efficiency 87,0% **A+**
WxDxH 620x380x780 mm

 4-8 kW
 EA

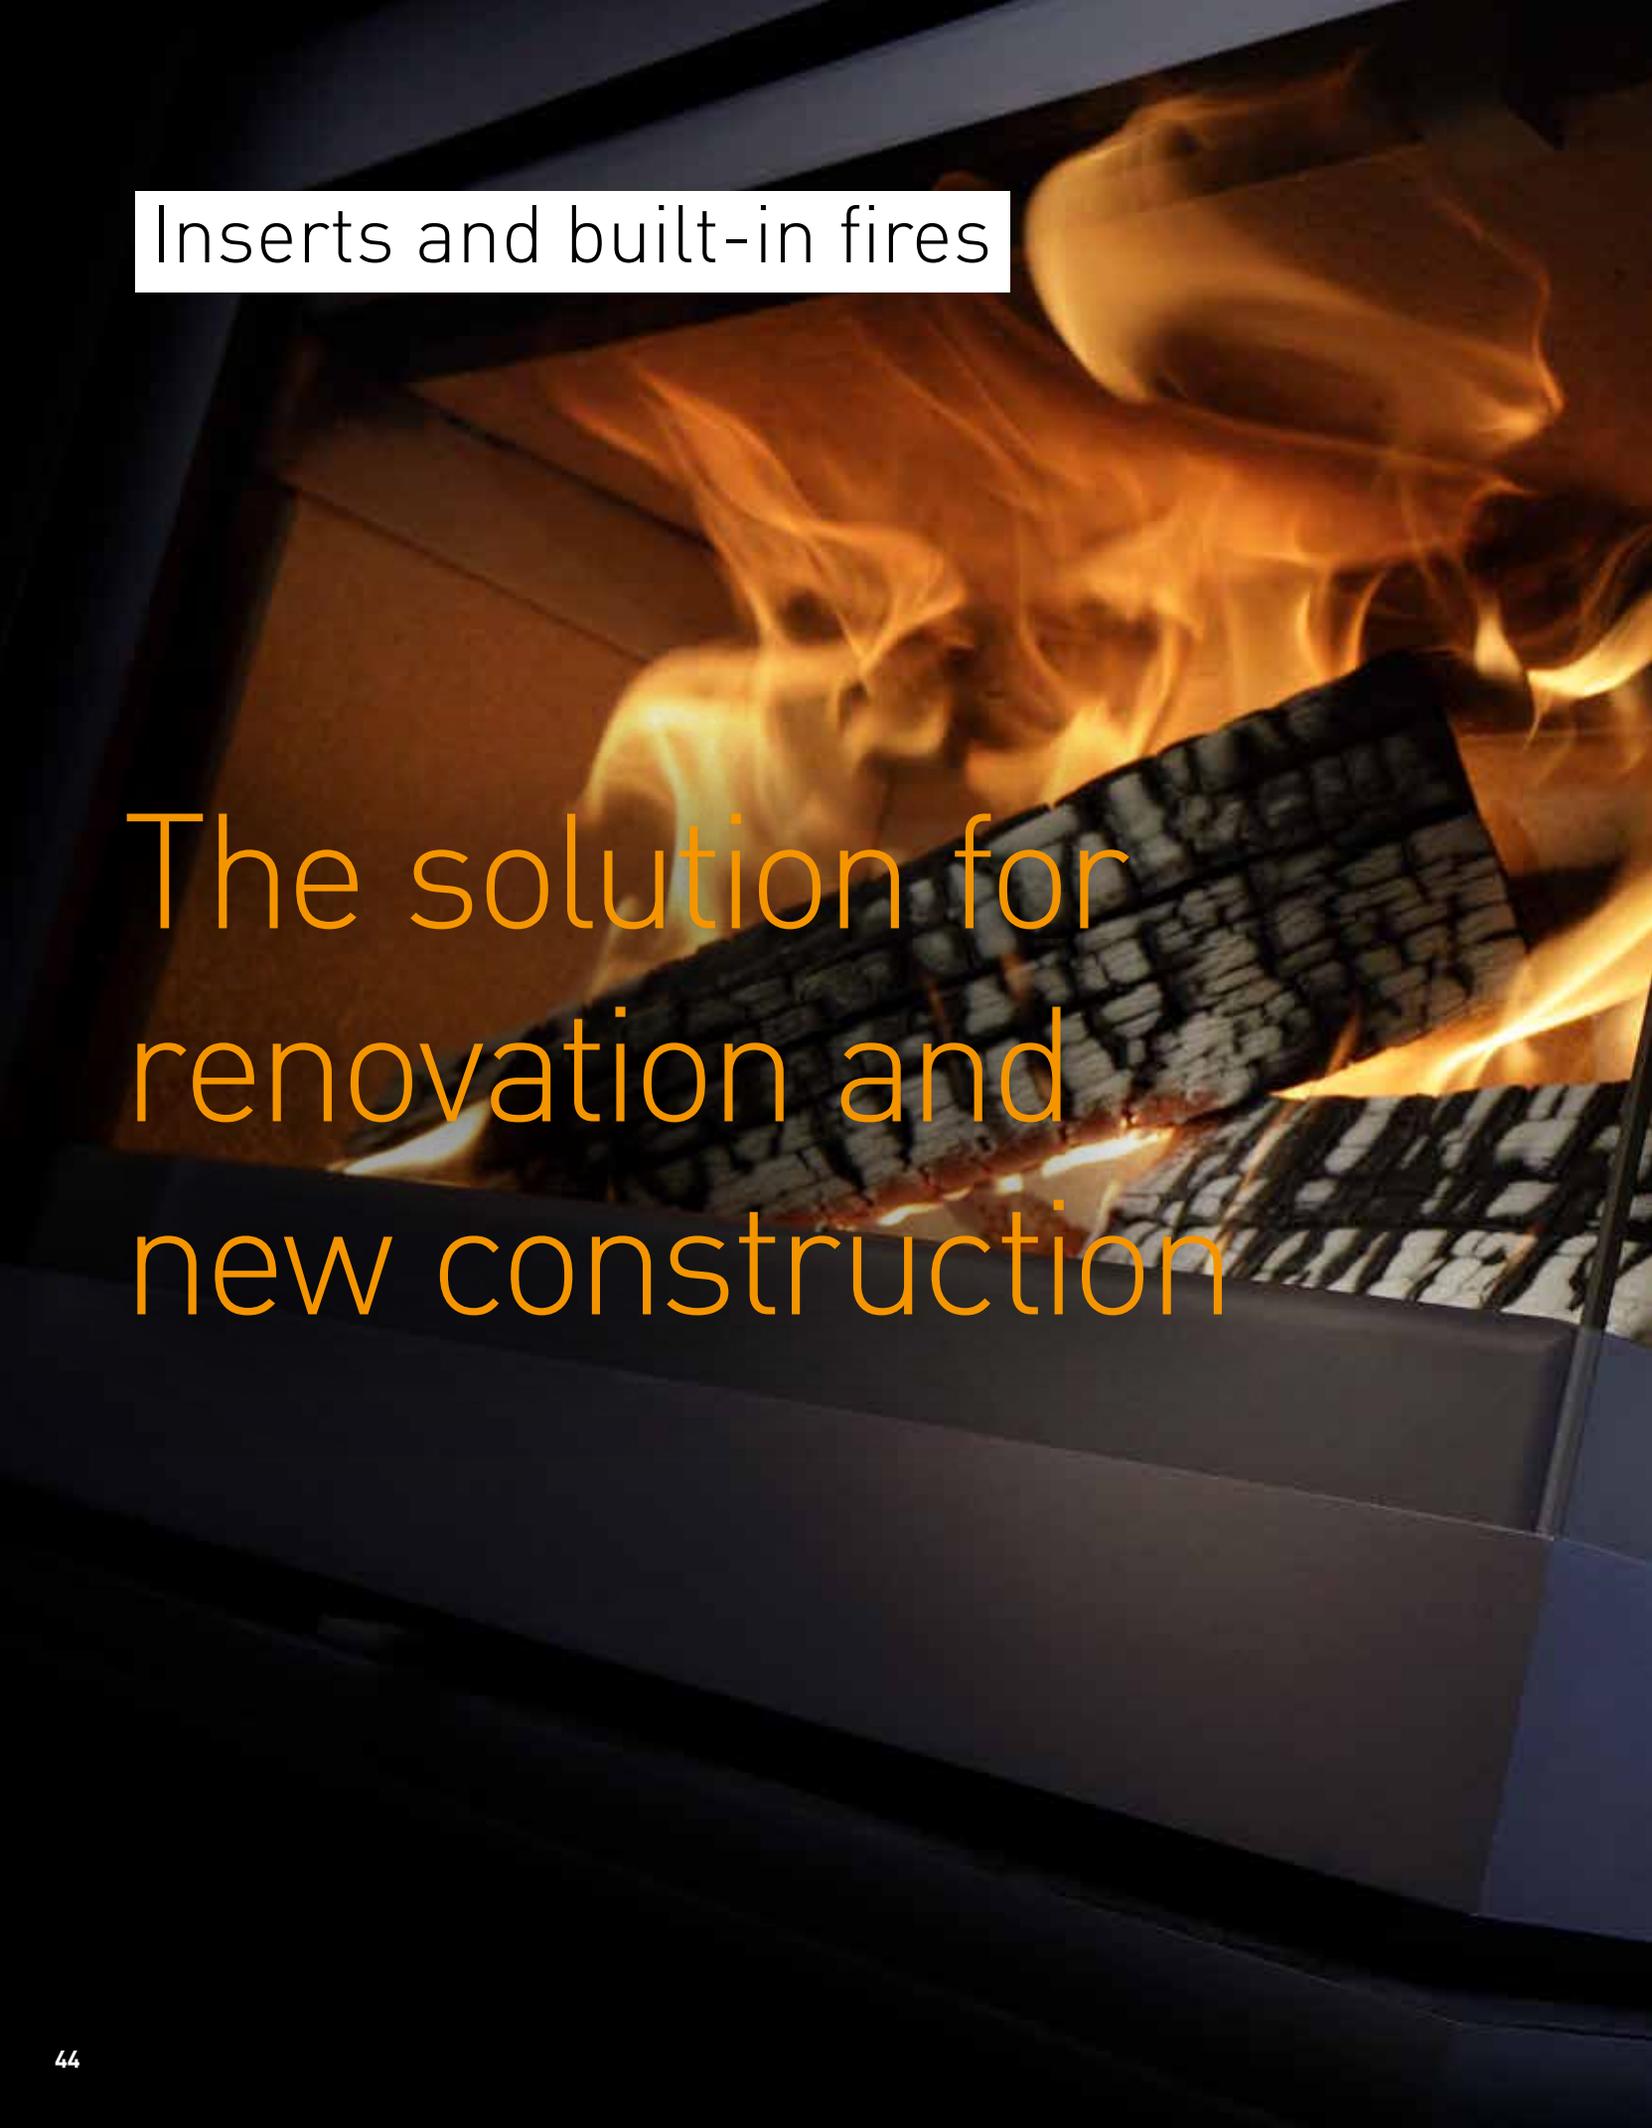

Inserts and built-in fires

The solution for
renovation and
new construction

Inserts are designed for installation in an existing situation. When converting or renovating, an old fire can be replaced easily by a modern and environmentally friendly fire with a higher output. Built-in fires are placed predominantly in new situations.

Page
48



**FRONT
INSTYLE**

500
550
600
650
700
800
1000

Page
50



**FRONT
PROSTYLE**

500
550
600
650
700
800
1000

Page
52



**FRONT, FAN
INSTYLE**

600V Next
700V Next
800V Next

Page
54



**TUNNEL
INSTYLE**

Tunnel 700

Page
54



**TUNNEL
PROSTYLE**

Tunnel 700

Page
56



**2-SIDED SLIM
INSTYLE**

Corner Slim 660/495
Corner Slim 660/570


Page
58



**2-SIDED
INSTYLE**

Corner 660 Low
Corner 660 High

Page
59



**3-SIDED
INSTYLE**

Triple 660 Low

Instyle & Prostyle

Inserts and built-in fires for every interior

Dik Geurts has a wide range of inserts and built-in fires. Tunnel fires, 3-sided fires, fires with an extra large glass window and different kinds of frames; we have a suitable fire for every interior.

The Instyle fires have a completely clear glass window. The Prostyle range with screen-printed glass are made for an even more beautiful view of the fire.



Door and glass options



Instyle fireplaces
Clear glass window




Prostyle fireplaces
Black screen-printed glass

Frames

A frame creates a neat and finished look for the built-in/insert fireplace. It hides any spaces between the fireplace and the surrounding wall, creating a seamless and professional look. At Dik Geurts, there is a very wide choice of frames in different styles.

Standard frames for front and tunnel fires

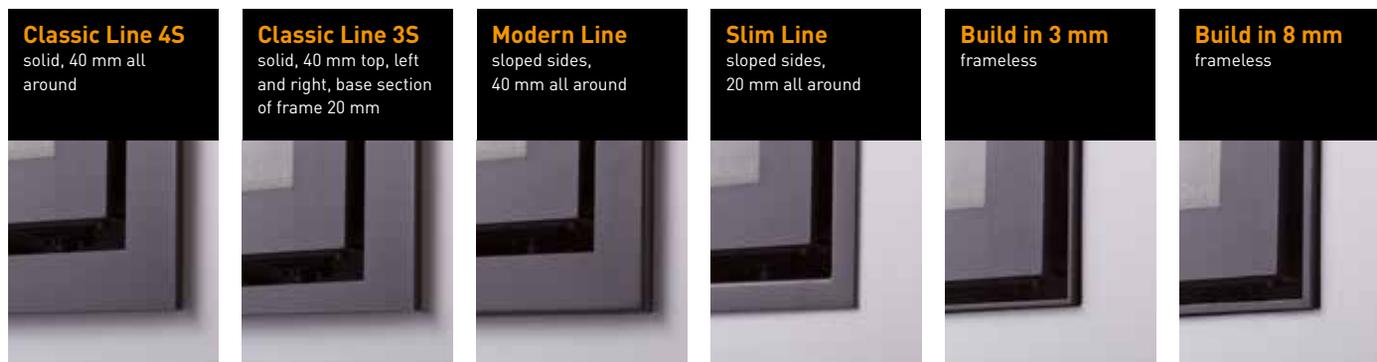

Frame type	Instyle/Prostyle	Instyle/Prostyle						
		500	550	600	650	700-Tunnel ¹⁾	800	1000
Classic Line 4S	WxH	580 x 537	587 x 617	660 x 537	710 x 552	760 x 657	860 x 637	1060 x 637
Classic Line 3S	WxH	580 x 517	n/a	660 x 517	710 x 532	n/a	n/a	n/a
Modern Line	WxH	580 x 537	587 x 617	660 x 537	710 x 552	760 x 657	860 x 637	1060 x 637
Slim Line	WxH	540 x 497	547 x 577	620 x 497	670 x 512	720 x 617	820 x 597	1020 x 597
Build in 3 mm	WxH	600 x 557	607 x 637	680 x 557	730 x 572	780 x 677	880 x 657	1080 x 657
Build in 8 mm	WxH	n/a	n/a	600x477	650x492	700x597	n/a	n/a

¹⁾ Frames on the Tunnel can be combined.

Standard frames for front fires with ventilating fan



Frame type	Instyle	Instyle		
		600V Next	700V Next	800V Next
Classic Line 4S	WxH	640 x 547	740 x 667	840 x 647
Build in 3 mm	WxH	566 x 473	666 x 593	766 x 573

Custom-made frames

The Dik Geurts product options are extensive. Nevertheless, it is possible that something does not fit during a conversion or renovation. In that case, a solid Classic Line 4S front frame can be custom-made to fit an existing fireplace opening. The width can vary between 20 and 100 mm.

Available for fireplaces:

- Instyle/Prostyle 500, 550, 600, 650, 700, 800, 1000
- Instyle/Prostyle Tunnel
- Instyle 600V Next, 700V Next, 800V Next

Instyle Front

Replace your old (open) fireplace for an eco-friendly one

The Instyle/Prostyle series consists of a number of models with different sizes, all using the same modern Dik Geurts techniques. With an Instyle you are assured of optimal enjoyment of a quality fire.

- Environmentally conscious enjoyment of fire
- Multi-purpose insert and built-in fires
- Different styles of detachable frames
- Choice of different frame types
- Optional kit for self-closing door (Instyle 500-700)



Instyle 500



Efficiency 82,0% **A+**
WxDxH 580x350x537 mm



3-7 kW EA



Instyle 550



Efficiency 81,0% **A+**
WxDxH 587x350x617 mm



3-7 kW EA



Instyle 600



Efficiency 79,6% **A**
WxDxH 660x360x537 mm



3-7 kW EA



Instyle 650



Rendement 80,5% **A**
WxDxH 710x380x552 mm



3-9 kW EA



Instyle 550



Instyle 700

Efficiency 81,6% **A+**
WxDxH 760x400x657 mm



6-12 kW EA

Instyle 800

Efficiency 76,6% **A**
WxDxH 860x400x637 mm



8-12 kW EA

Instyle 1000

Efficiency 77,7% **A**
WxDxH 1060x400x637 mm



9-13 kW EA



Prostyle Front

Beautiful fire view
thanks to black
screen-printed glass

Prostyle 1000



Prostyle 500

Efficiency 82,0% **A+**
WxDxH 580x344x537 mm



3-7 kW EA



Prostyle 550

Efficiency 81,0% **A+**
WxDxH 587x344x617 mm



3-7 kW EA



Prostyle 600

Efficiency 79,6% **A**
WxDxH 660x354x537 mm



3-7 kW EA



Prostyle 650


Efficiency 80,5% **A**
WxDxH 710x374x552 mm



3-9 kW EA



Prostyle 550

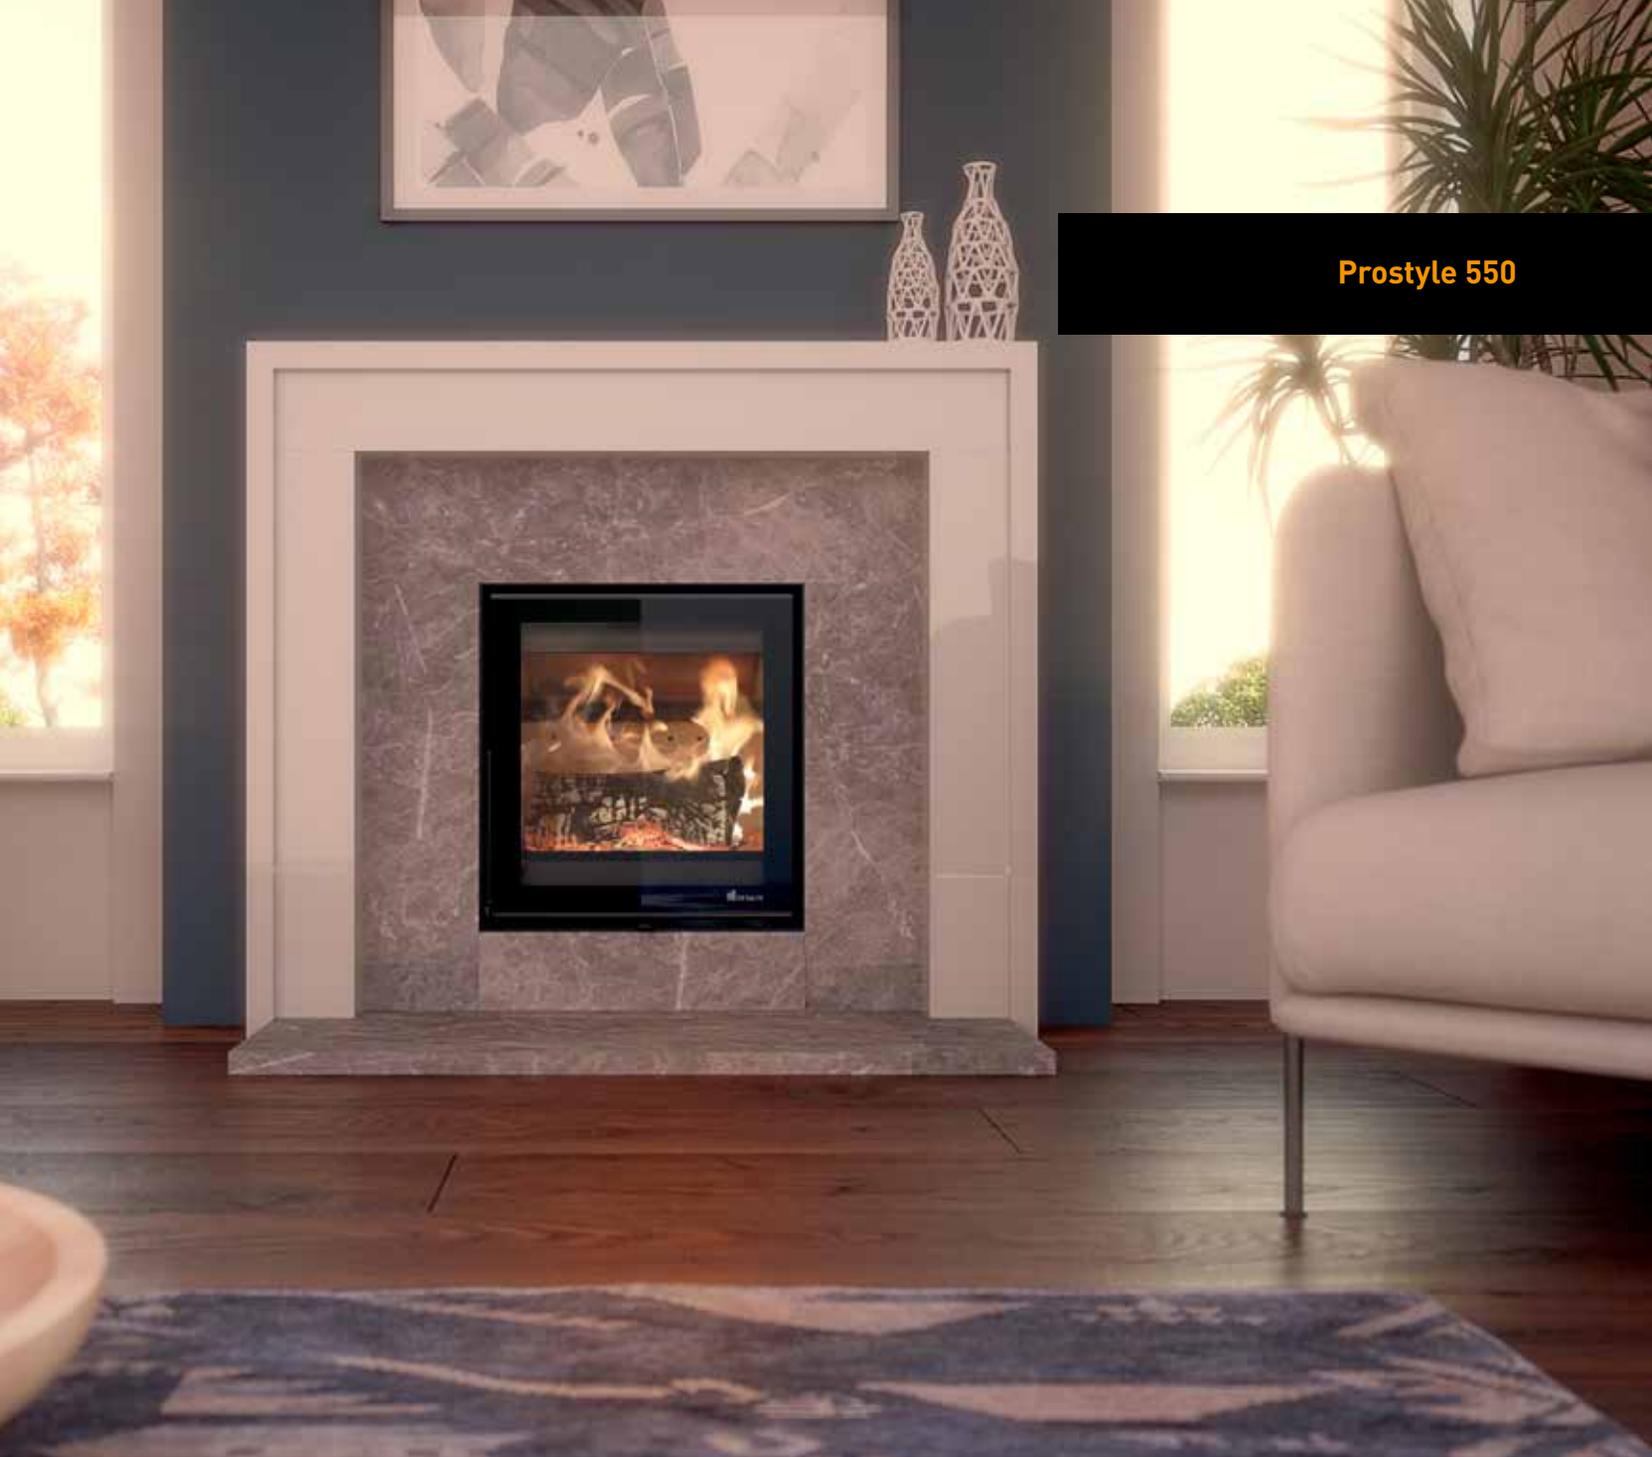

Prostyle 700

Efficiency 81,6% **A+**
WxDxH 760x394x657mm



6-12 kW EA

Prostyle 800

Efficiency 76,6% **A**
WxDxH 860x394x637mm



8-12 kW EA

Prostyle 1000

Efficiency 77,7% **A**
WxDxH 1060x394x637mm



9-13 kW EA



Instyle Front, ventilator

Fire insert with ventilating fan

These ventilated inserts are equipped with a ventilating fan, which heats a room faster. When switched on, a pleasant, warm airflow can be felt from the front of the fire or through the convection openings.

Why Instyle V Next?

- Rapid heat distribution
- Impressive fire view
- Simple operation
- An efficient replacement for old fireplaces
- Optional kit for self-closing door (Instyle 600V Next, 700V Next)

How does it work?

A special adapter gives you full control of the fan. There are four speeds for gradual to rapid heating. And, thanks to a smart control sensor, the fan automatically adjusts to the desired temperature.



More information?
Watch the Instyle V Next video.

Instyle 600V Next

Efficiency 79,6% **A**
WxDxH 580x410x495mm



3-7 kW EA

Instyle 700V Next

Efficiency 81,6% **A+**
WxDxH 680x450x615mm



6-12 kW EA

Instyle 800V Next

Efficiency 76,6% **A**
WxDxH 780x450x595mm



8-12 kW EA



Instyle 700V Next



Instyle & Prostyle Tunnel 700

Splendid fire from two sides

The tunnel fireplaces Instyle and Prostyle Tunnel 700 have a hinged glass door on two sides. Thanks to its high output, this fire is ideal as a room divider in larger rooms.

- Beautiful see-through tunnel
- High output up to 12 kW
- In RS version almost completely airtight
- Optional kit for self-closing door (Instyle Tunnel 700)

Instyle Tunnel 700

Efficiency 83,0% **A+**
WxDxH 760x550x657 mm



9-12 kW EA RS

Prostyle Tunnel 700

Efficiency 83,0% **A+**
WxDxH 760x554x657 mm



9-12 kW EA



Scan the QR code
for a preview

Instyle Tunnel 700



Scan the QR code
for a preview

Instyle Corner Slim

Unique panoramic fire view

These two-sided wood stoves are characterised by their panoramic fire view. The glass panes are placed against one another in the corner. This continuous glass window, without a metal corner post between the two panes, provides a full view of the fire.

- Optimal view of the fire
- High efficiency
- Perfect for an existing chimney or new construction
- Optional build in frame



Instyle Corner Slim 660/570

Rendement 80,0% **A**
B x D x H 660 x 350 x 570 mm



5-10 kW

EA

RS





Scan the QR code for a preview



Instyle Corner Slim 660/495

Efficiency 75,2% **A**
WxDxH 660x350x495 mm



4-10 kW



EA



RS



Optional build in frame 6S

- For a seamless finish to the fireplace assembly
- Very suitable for installation in a new build situation
- Width 6 cm (working width 5 cm)
- Solid frame, thickness 6 mm




SlideConnect®

(only at Instyle Corner Slim 660/495)

- Easy connection to an existing or new flue
- Rotatable ring with 4 cm extra working space
- A major advantage, especially in existing situations

Instyle Corner 660 Low

Efficiency 76,3% **A**
WxDxH 660x350x495 mm

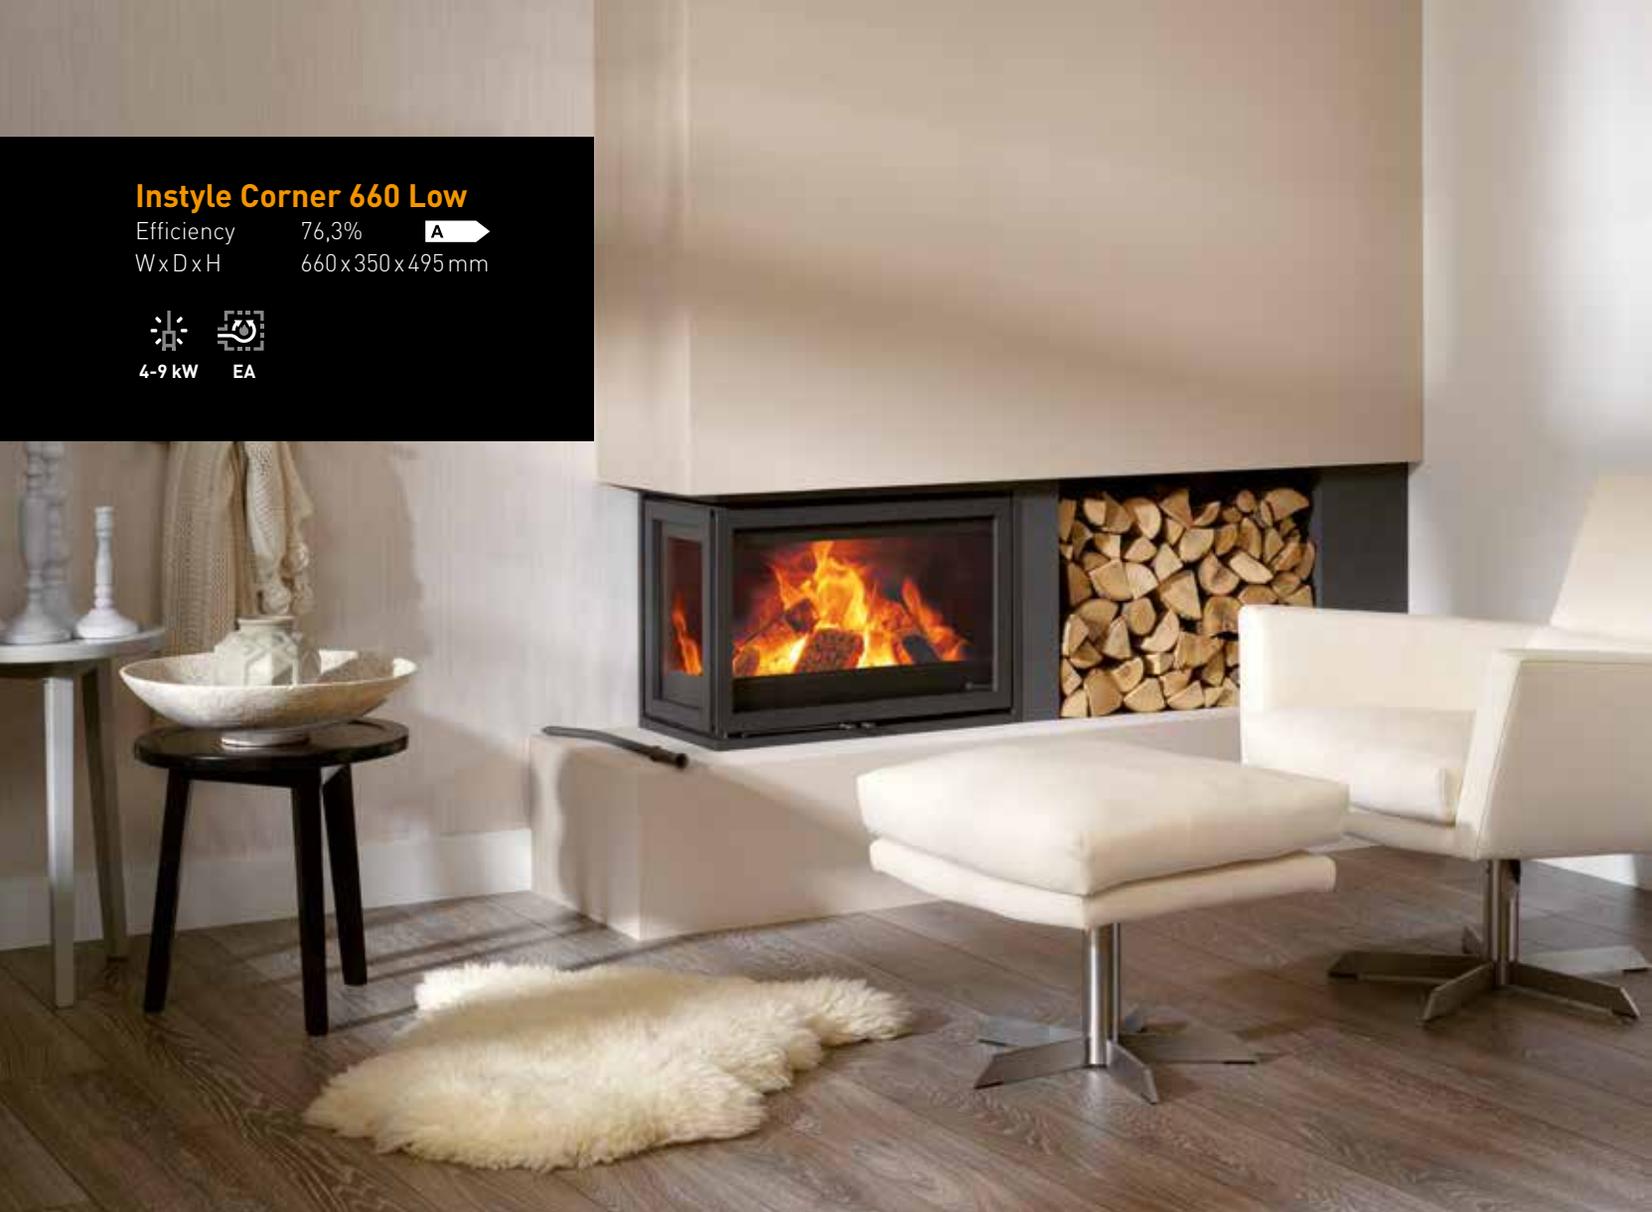

Instyle Corner

Spacious insert
with wide fire view

Instyle Corner 660 High

Efficiency 76,3% **A**
WxDxH 660 x 350 x 520 mm



Instyle Triple

Three sided glass and three sided fire

To ensure the highest possible efficiency, this insert is fitted with side windows with heat-reflecting infrared glass. This fire is only 49.5 cm high and therefore ideal for installation in most existing fireplaces.

- Subtle corner bars for better fire vision
- Suitable for installation in existing situation
- In RS version almost completely airtight

Instyle Triple 660 Low

Efficiency 76,3% **A**
WxDxH 662x380x495 mm



4-9 kW



IR



EA



RS



Easy installation

The various connection options ensure that the stove is quick and easy to install, regardless of the installation situation. There are three options for flue gas extraction.

1. Connection without drain material to an existing chimney flue (**sealing with ceramic wool**)
2. Connection with flexible or fixed pipe (**Liner Kit Pro**), Ø 150 or 180 mm
3. Connection with rejuvenated pipe (**connection piece**), Ø 150 or 180 mm

External air kit

Kit for supply of fresh air from outside, ideal for fully insulated houses

- Optional at 500 - 1000, 600V, Tunnel (only base)
- For rear and base connection
- Dimensions: Ø 80 mm



Linerkit Pro

Connection piece for flexible or rigid pipe.

- Optional with: 500 - 1000, 600V, Corner, Triple, Tunnel
- Connectable from the inside of the fire
- Reducer with 3 screw holes
- Dimensions: Ø 150 mm, Ø 180 mm



Connection piece

Connection piece for rejuvenated pipe.

- Optional at: 500 - 1000, 600V, Corner, Triple, Tunnel
- Reducer with 3 screw holes
- Dimensions: Ø 150 mm, Ø 180 mm



Convection kit

Connecting rings (2 pieces) for mounting on the convection holes.


- Optional with: 500 - 1000, 600V, Corner Slim, Tunnel
- For more heating power
- Dimensions: Ø 125 mm




INSERT-/BUILT-IN FIRES CONNECTION OPTIONS

Instyle / Prostyle


External air kit




Linerkit Pro



Connection piece



Convection kit







Easy air control

- At the front of the fire
- Both Instyle and Prostyle finishes

Door lock

- Stable and flexible door closure
- The cord ensures a good seal
- The door is adjustable and exchangeable
- Kit for self-closing door optional for Instyle 500-1000 series and Instyle Tunnel
- Optional kit for self-closing door (Instyle: 500-700, 600V Next, 700V Next, Tunnel 700)

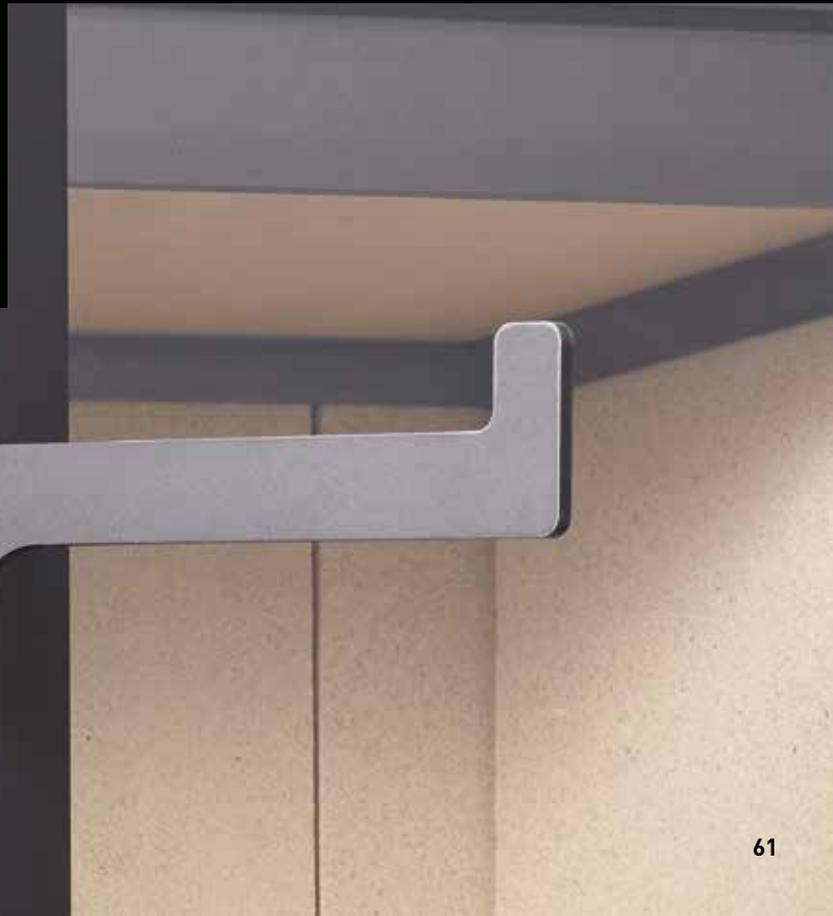

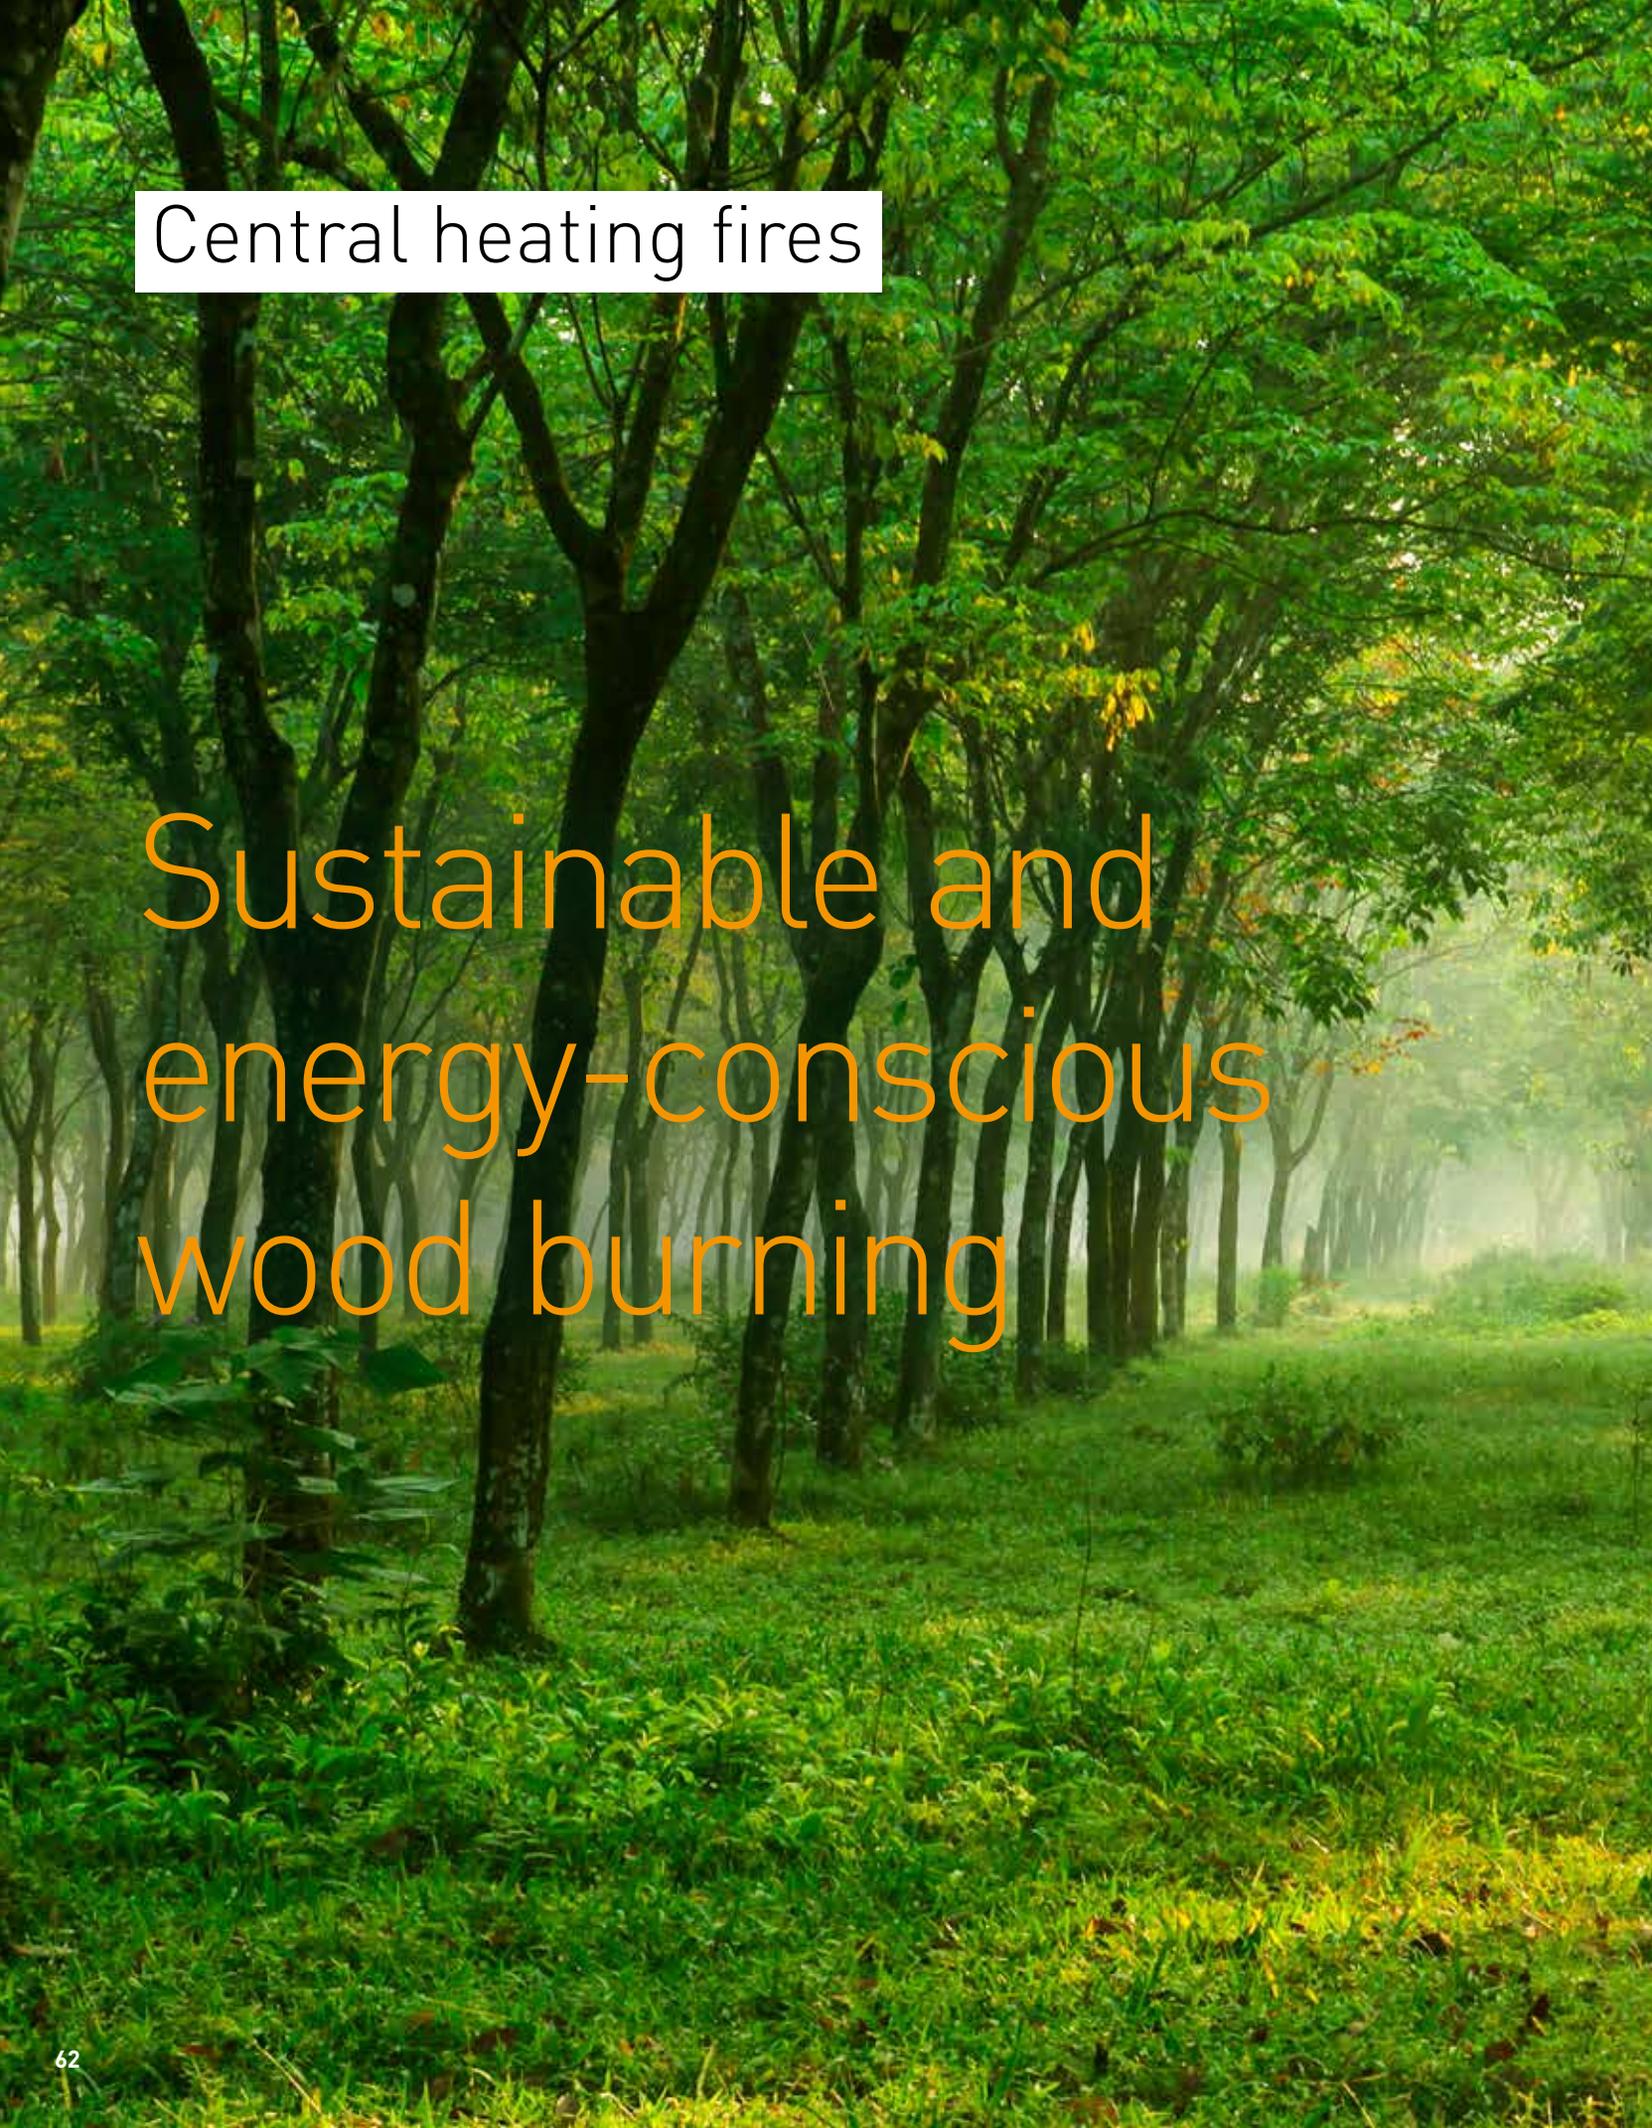

Central heating fires

Sustainable and energy-conscious wood burning

Green Design stands for sustainable, environmentally friendly and energy-conscious heating of fires and stoves connected to a central heating system.

Dik Geurts also supplies fires that you can connect to a central heating system, an environmentally friendly alternative way to heat your home. With these fires the hot flue gases are used to heat the water for your central heating system. Doing this means you get more efficiency from your fire or stove, resulting in a lower energy bill – and it's also sustainable.

- Environmentally friendly heating
- Durable/lower energy usage
- Suitable for any type of home
- Can be combined with solar panels and heat pumps
- Lower energy bill
- Maintenance friendly

More info

If you want to know more about Green Design or the operation of central heating fireplaces, visit www.greendesign.eu.



Ivar 10 H2O, Store

Efficiency	81,5%
WxDxH	650 x 468 x 1000 mm



















8-12 kW IR EA RS A+


Technical drawings

DESIGN FIRES

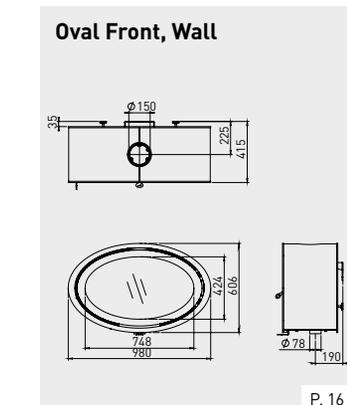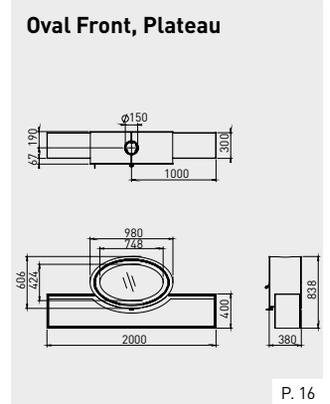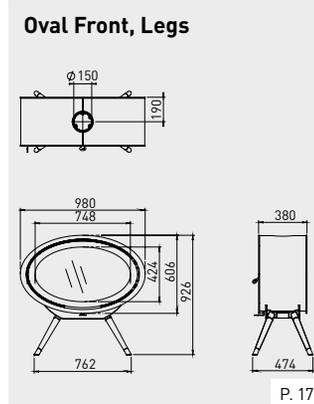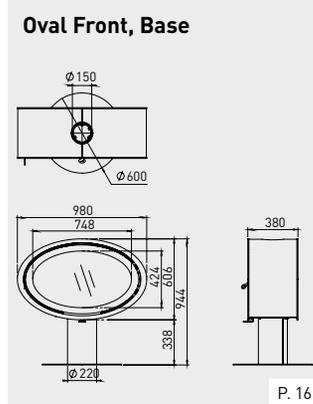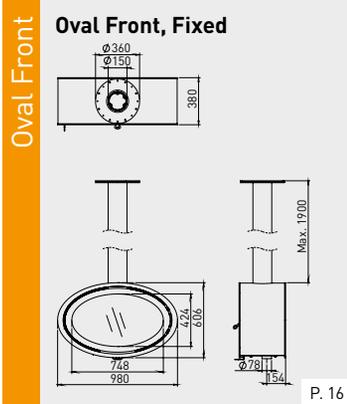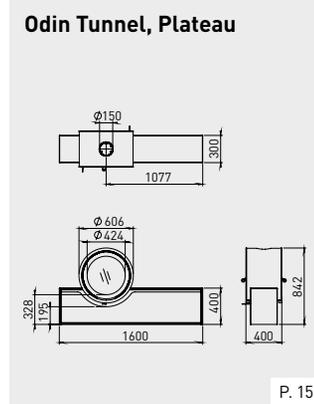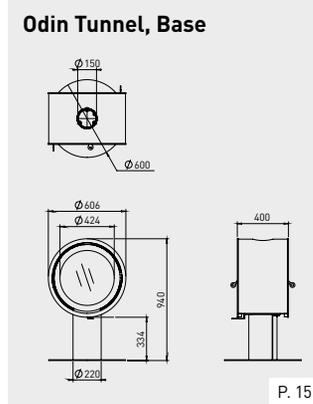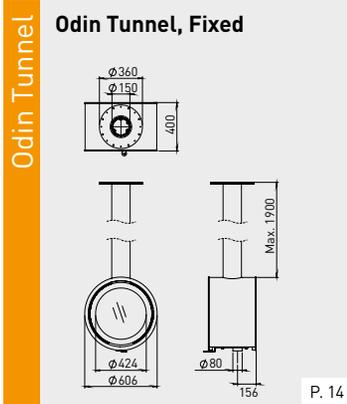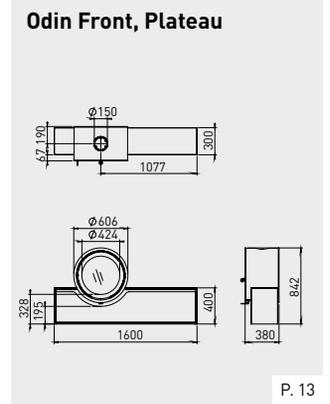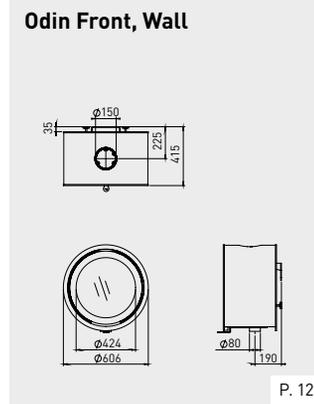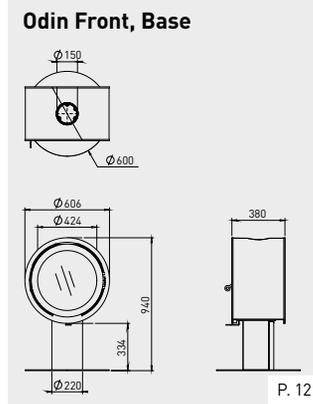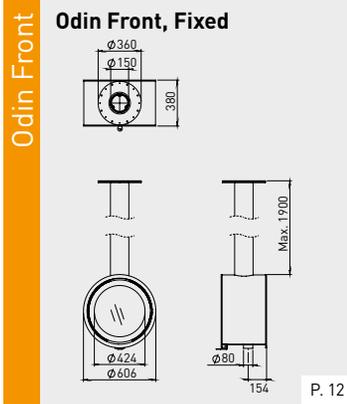


Oval Tunnel

Oval Tunnel, Fixed




P. 18

Oval Tunnel, Base




P. 19

Oval Tunnel, Legs



P. 19


Oval Tunnel, Plateau



P. 19


Bora Corner

Bora Corner, Cubes




P. 20

Bora Corner, Fixed




P. 21

Bora Corner, Floating Plateau




P. 22

Bora Corner, Straight Plateau



P. 23

Bora Corner, Wall




P. 23

WOOD AND MULTI-FUEL STOVES


Vidar Triple

Vidar Triple Medium, Store




P. 26

Vidar Triple Medium, Floating Plateau




P. 26

Vidar Triple Medium, Straight Plateau
















P. 26

Vidar Triple Medium, Wall




P. 26

WOOD AND MULTI-FUEL STOVES

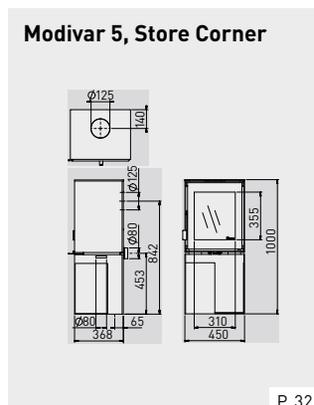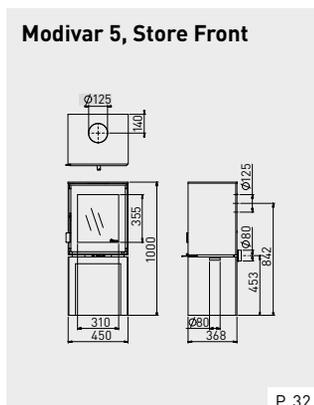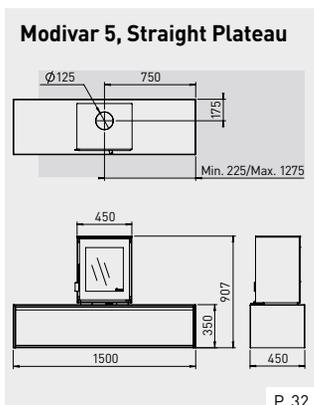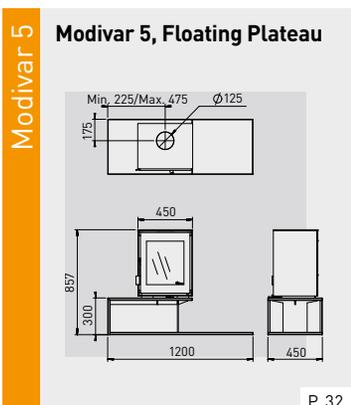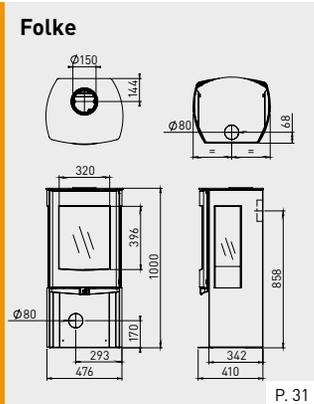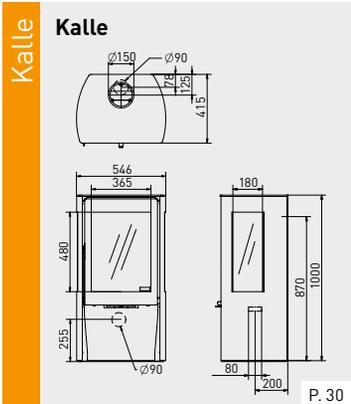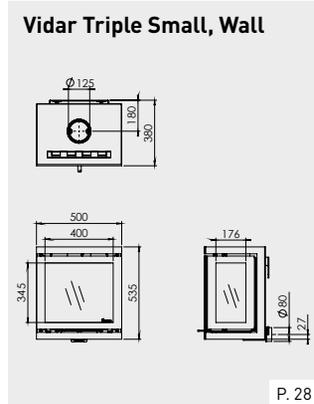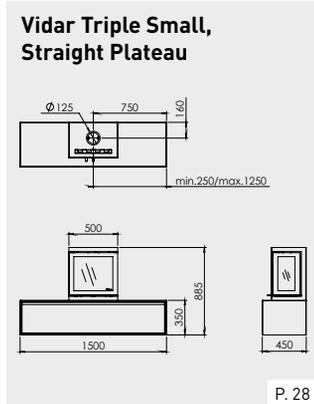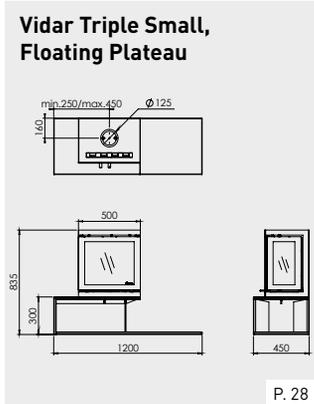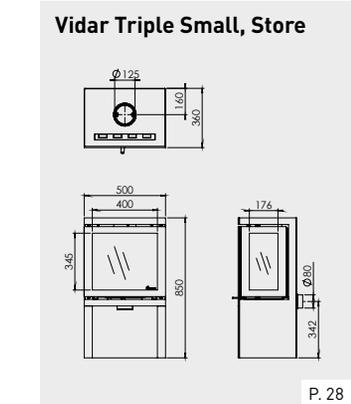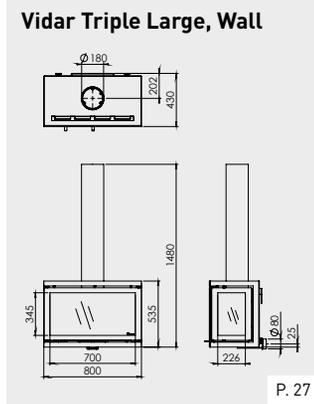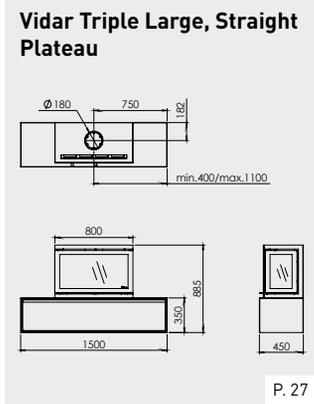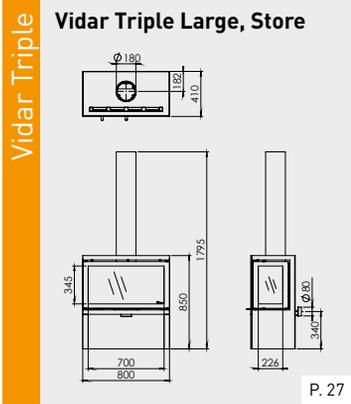

Orbe


Orbe



P. 33

Soren 5


Soren 5



P. 34

Aste 5


Aste 5



P. 34

Lars 1000


Lars 1000



P. 35


Ivar 5

Ivar 5, Low




P. 37

Ivar 5, High



P. 38


Ivar 5, Store



P. 39


Ivar 8

Ivar 8, Low



P. 40


Ivar 8, Store



P. 41


Jannik

Jannik Medium, Low




P. 42

Jannik Medium, High



P. 42

Jannik Large



P. 43

INSERT-/BUILT-IN FIRES INSTYLE/PROSTYLE

Instyle Front

Instyle 500
+ Classic Line kader 4S

Technical drawing showing front and side views of the Instyle 500 fire insert. The front view shows a width of 520mm and a height of 350mm. The side view shows a depth of 480mm. The fire opening is 340mm wide and 190mm high. The distance between the two side doors is 144mm. The overall width including the side doors is 580mm.

P. 48

Instyle 550
+ Classic Line kader 4S

Technical drawing showing front and side views of the Instyle 550 fire insert. The front view shows a width of 527mm and a height of 350mm. The side view shows a depth of 560mm. The fire opening is 340mm wide and 170mm high. The distance between the two side doors is 144mm. The overall width including the side doors is 587mm.

P. 48

Instyle 600
+ Classic Line kader 4S

Technical drawing showing front and side views of the Instyle 600 fire insert. The front view shows a width of 600mm and a height of 360mm. The side view shows a depth of 480mm. The fire opening is 400mm wide and 190mm high. The distance between the two side doors is 144mm. The overall width including the side doors is 660mm.

P. 48

Instyle 650
+ Classic Line kader 4S

Technical drawing showing front and side views of the Instyle 650 fire insert. The front view shows a width of 650mm and a height of 380mm. The side view shows a depth of 495mm. The fire opening is 497mm wide and 190mm high. The distance between the two side doors is 144mm. The overall width including the side doors is 710mm.

P. 48

Instyle Front

Instyle 700
+ Classic Line kader 4S

Technical drawing showing front and side views of the Instyle 700 fire insert. The front view shows a width of 700mm and a height of 400mm. The side view shows a depth of 600mm. The fire opening is 545mm wide and 190mm high. The distance between the two side doors is 137mm. The overall width including the side doors is 760mm.

P. 48

Instyle 800
+ Classic Line kader 4S

Technical drawing showing front and side views of the Instyle 800 fire insert. The front view shows a width of 800mm and a height of 400mm. The side view shows a depth of 980mm. The fire opening is 645mm wide and 190mm high. The distance between the two side doors is 137mm. The overall width including the side doors is 860mm.

P. 48

Instyle 1000
+ Classic Line kader 4S

Technical drawing showing front and side views of the Instyle 1000 fire insert. The front view shows a width of 1000mm and a height of 400mm. The side view shows a depth of 980mm. The fire opening is 845mm wide and 190mm high. The distance between the two side doors is 137mm. The overall width including the side doors is 1060mm.

P. 48

Prostyle Front

Prostyle 500
+ Modern Line kader

Technical drawing showing front and side views of the Prostyle 500 fire insert. The front view shows a width of 520mm and a height of 344mm. The side view shows a depth of 480mm. The fire opening is 340mm wide and 190mm high. The distance between the two side doors is 144mm. The overall width including the side doors is 580mm.

P. 50

Prostyle 550
+ Modern Line kader

Technical drawing showing front and side views of the Prostyle 550 fire insert. The front view shows a width of 527mm and a height of 344mm. The side view shows a depth of 560mm. The fire opening is 340mm wide and 170mm high. The distance between the two side doors is 144mm. The overall width including the side doors is 587mm.

P. 50

Prostyle 600
+ Modern Line kader

Technical drawing showing front and side views of the Prostyle 600 fire insert. The front view shows a width of 600mm and a height of 354mm. The side view shows a depth of 480mm. The fire opening is 400mm wide and 190mm high. The distance between the two side doors is 144mm. The overall width including the side doors is 660mm.

P. 50

Prostyle 650
+ Modern Line kader

Technical drawing showing front and side views of the Prostyle 650 fire insert. The front view shows a width of 650mm and a height of 371mm. The side view shows a depth of 495mm. The fire opening is 497mm wide and 190mm high. The distance between the two side doors is 144mm. The overall width including the side doors is 710mm.

P. 50

Prostyle 700
+ Modern Line kader

Technical drawing showing front and side views of the Prostyle 700 fire insert. The front view shows a width of 700mm and a height of 394mm. The side view shows a depth of 600mm. The fire opening is 545mm wide and 190mm high. The distance between the two side doors is 137mm. The overall width including the side doors is 760mm.

P. 50

Prostyle 800
+ Modern Line kader

Technical drawing showing front and side views of the Prostyle 800 fire insert. The front view shows a width of 800mm and a height of 394mm. The side view shows a depth of 980mm. The fire opening is 645mm wide and 190mm high. The distance between the two side doors is 137mm. The overall width including the side doors is 860mm.

P. 50


Prostyle 1000
+ Modern Line kader

Technical drawing showing front and side views of the Prostyle 1000 fire insert. The front view shows a width of 1000mm and a height of 394mm. The side view shows a depth of 980mm. The fire opening is 845mm wide and 190mm high. The distance between the two side doors is 137mm. The overall width including the side doors is 1060mm.

P. 50


Instyle (ventilator)

Instyle 600V Next
+ Classic Line kader 4S




P. 52

Instyle 700V Next
+ Classic Line kader 4S



P. 52


Instyle 800V Next
+ Classic Line kader 4S



P. 52

Instyle Tunnel


Instyle Tunnel 700
+ Classic Line kader 4S



P. 54

Prostyle Tunnel


Prostyle Tunnel 700
+ Slim Line kader



P. 54


Instyle Corner Slim

Instyle Corner Slim 660/495



P. 56


Instyle Corner Slim 660/570



P. 56


Instyle Corner

Instyle Corner 660 Low



P. 58


Instyle Corner 660 High



P. 58

Instyle Triple

Instyle Triple 660 Low




P. 59

CENTRAL HEATING FIRES

Ivar 10 H20

Ivar 10 H20, Store



P. 62

Technical specifications

Page	Wood burning fireplaces and stoves																		
		Net output (kW)	Efficiency (%)	Energy efficiency class	Flue upper (ø, mm)	Flue rear (ø, mm)	External air connection (EA)	External air connection (RS)	Maximum log length (cm)	Weight (kg)	Interior vermiculite natural	Interior vermiculite dark anthracite	Infrared glass (IR)	DG Smart Assist (app control)	Type: wall	Type: freestanding	Type: free hanging	Type: insert	Type: built-in
Design fires																			
Front fires																			
12	Odin Front, Fixed	4,0 - 8,0	75,2	A	150	-	optional	-	33	85	-	+	-	-	-	-	+	-	-
12	Odin Front, Base	4,0 - 8,0	75,2	A	150	-	optional	-	33	100	-	+	-	-	-	+	-	-	-
12	Odin Front, Wall	4,0 - 8,0	75,2	A	150	-	optional	-	33	85	-	+	-	-	+	-	-	-	-
13	Odin Front, Plateau	4,0 - 8,0	75,2	A	150	-	optional	-	33	125	-	+	-	-	-	+	-	-	-
16	Oval Front, Fixed	6,0 - 10,0	75,9	A	150	-	optional	including	50	120	-	+	-	-	-	-	+	-	-
16	Oval Front, Base	6,0 - 10,0	75,9	A	150	-	optional	including	50	135	-	+	-	-	-	+	-	-	-
16	Oval Front, Plateau	6,0 - 10,0	75,9	A	150	-	optional	including	50	160	-	+	-	-	-	+	-	-	-
16	Oval Front, Wall	6,0 - 10,0	75,9	A	150	-	optional	including	50	120	-	+	-	-	+	-	-	-	-
17	Oval Front, Legs	6,0 - 10,0	75,9	A	150	-	optional	including	50	130	-	+	-	-	-	+	-	-	-
Tunnel fires																			
14	Odin Tunnel, Fixed	6,0 - 10,0	75,0	A	150	-	optional	-	33	85	-	+	-	-	-	-	+	-	-
15	Odin Tunnel, Base	6,0 - 10,0	75,0	A	150	-	optional	-	33	130	-	+	-	-	-	+	-	-	-
15	Odin Tunnel, Plateau	6,0 - 10,0	75,0	A	150	-	optional	-	33	125	-	+	-	-	-	+	-	-	-
18	Oval Tunnel, Fixed	9,0 - 12,0	81,5	A+	150	-	optional	including	50	120	-	+	+	-	-	-	+	-	-
19	Oval Tunnel, Base	9,0 - 12,0	81,5	A+	150	-	optional	including	50	135	-	+	+	-	-	+	-	-	-
19	Oval Tunnel, Legs	9,0 - 12,0	81,5	A+	150	-	optional	including	50	130	-	+	+	-	-	+	-	-	-
19	Oval Tunnel, Plateau	9,0 - 12,0	81,5	A+	150	-	optional	including	50	160	-	+	+	-	-	+	-	-	-
2-sided fires																			
20	Bora Corner, Cubes	4,0 - 9,0	78,1	A	150	-	optional	including	36	145	-	+	+	-	-	+	-	-	-
21	Bora Corner, Fixed	4,0 - 9,0	78,1	A	150	-	optional	including	36	95	-	+	+	-	-	-	+	-	-
21	Bora Corner, Floating Plateau	4,0 - 9,0	78,1	A	150	-	optional	including	36	145	-	+	+	-	-	+	-	-	-
22	Bora Corner, Straight Plateau	4,0 - 9,0	78,1	A	150	-	optional	including	36	140	-	+	+	-	-	+	-	-	-
23	Bora Corner, Wall	4,0 - 9,0	78,1	A	150	-	optional	including	36	95	-	+	+	-	+	-	-	-	-
Wood and multi-fuel stoves																			
3-sided fires																			
26	Vidar Triple Medium, Store	4,0 - 9,0	76,3	A	150	-	optional	including	50	130	+	-	+	+	-	+	-	-	-
26	Vidar Triple Medium, Floating Plateau	4,0 - 9,0	76,3	A	150	-	optional	including	50	170	+	-	+	+	-	+	-	-	-
26	Vidar Triple Medium, Straight Plateau	4,0 - 9,0	76,3	A	150	-	optional	including	50	165	+	-	+	+	-	+	-	-	-
26	Vidar Triple Medium, Wall	4,0 - 9,0	76,3	A	150	-	optional	including	50	123	+	-	+	+	+	-	-	-	-
28	Vidar Triple Large, Store	6,0 - 10,0	79,0	A	180	-	optional	including	50	137	+	-	+	+	-	+	-	-	-
28	Vidar Triple Large, Straight Plateau	6,0 - 10,0	79,0	A	180	-	optional	including	50	173	+	-	+	+	-	+	-	-	-
28	Vidar Triple Large, Wall	6,0 - 10,0	79,0	A	180	-	optional	including	50	131	+	-	+	+	+	-	-	-	-
29	Vidar Triple Small, Store	4,0 - 7,0	79,0	A	125/130	-	optional	including	35	102	+	-	+	+	-	+	-	-	-
29	Vidar Triple Small, Floating Plateau	4,0 - 7,0	79,0	A	125/130	-	optional	including	35	147	+	-	+	+	-	+	-	-	-
29	Vidar Triple Small, Straight Plateau	4,0 - 7,0	79,0	A	125/130	-	optional	including	35	142	+	-	+	+	-	+	-	-	-
29	Vidar Triple Small, Wall	4,0 - 7,0	79,0	A	125/130	-	optional	including	35	100	+	-	+	+	+	-	-	-	-
30	Kalle	4,0 - 8,0	85,0	A+	150	150	including	-	40	80	+	-	-	-	-	+	-	-	-
31	Folke	4,0 - 8,0	77,3	A	150	150	optional	including	33	80	+	-	+	+	-	+	-	-	-
Front fires																			
32	Modivar 5, Floating Plateau	4,9 - 7,0	82,0	A+	125/130	125/130	optional	including	35	140	+	-	-	-	-	+	-	-	-
32	Modivar 5, Straight Plateau	4,9 - 7,0	82,0	A+	125/130	125/130	optional	including	35	135	+	-	-	-	-	+	-	-	-
32	Modivar 5, Store Front	4,9 - 7,0	82,0	A+	125/130	125/130	optional	including	35	120	+	-	-	-	-	+	-	-	-
32	Modivar 5, Store Corner	4,9 - 7,0	82,0	A+	125/130	125/130	optional	including	35	120	+	-	-	-	-	+	-	-	-
33	Orbe	5,0 - 9,0	81,6	A+	150	150	optional	including	30	125	+	-	-	+	-	+	-	-	-
34	Soren 5	4,9 - 7,0	82,0	A+	125/130	125/130	optional	including	35	85	+	-	-	-	-	+	-	-	-
34	Aste 5	4,9 - 7,0	82,0	A+	125/130	125/130	optional	including	35	85	+	-	-	-	-	+	-	-	-

Page	Wood burning fireplaces and stoves	 Net output (kW)	 Efficiency (%)	 Energy efficiency class	 Flue upper (ø, mm)	 Flue rear (ø, mm)	 External air connection (EA)	 External air connection (RS)	 Maximum log length (cm)	 Weight (kg)	 Interior vermiculite natural	 Interior vermiculite dark anthracite	 Infrared glass (IR)	 DG Smart Assist (app control)	 Type: wall	 Type: freestanding	Type: free hanging	Type: insert	Type: built-in
Wood and multi-fuel stoves																			
Front fires																			
35	Lars 1000	4,9 - 7,0	82,0	A+	125/130	125/130	optional	including	35	100	+	-	-	-	-	+	-	-	-
37	Ivar 5, Low	4,9 - 7,0	82,0	A+	125/130	125/130	optional	including	35	85	+	-	-	-	-	+	-	-	-
38	Ivar 5, High	4,9 - 7,0	82,0	A+	125/130	125/130	optional	including	35	90	+	-	-	-	-	+	-	-	-
39	Ivar 5, Store	4,9 - 7,0	82,0	A+	125/130	125/130	optional	including	35	105	+	-	-	-	-	+	-	-	-
40	Ivar 8, Low	5,0 - 10,0	76,6	A	150	150	optional	including	46	100	+	-	-	-	-	+	-	-	-
41	Ivar 8, Store	5,0 - 10,0	76,6	A	150	150	optional	including	46	120	+	-	-	-	-	+	-	-	-
42	Jannik Medium, Low	4,9 - 7,0	82,0	A+	125/130	125/130	optional	-	35	90	+	-	-	-	-	+	-	-	-
42	Jannik Medium, High	4,9 - 7,0	82,0	A+	125/130	125/130	optional	-	35	90	+	-	-	-	-	+	-	-	-
43	Jannik Large	4,0 - 8,0	81,5	A+	130&150	130&150	optional	-	40	128	+	-	-	-	-	+	-	-	-
Inserts and built-in wood fires																			
Front fires																			
48	Instyle 500	3,0 - 7,0	82,0	A+	150	-	optional	-	35	80	+	-	-	-	-	-	-	+	+
48	Instyle 550	3,0 - 7,0	81,0	A+	150	-	optional	-	36	94	+	-	-	-	-	-	-	+	+
48	Instyle 600	3,0 - 7,0	79,6	A	150	-	optional	-	42	120	+	-	-	-	-	-	-	+	+
48	Instyle 650	3,0 - 9,0	80,5	A	150	-	optional	-	40	108	+	-	-	-	-	-	-	+	+
48	Instyle 700	6,0 - 12,0	81,6	A+	180	-	optional	-	45	116	+	-	-	-	-	-	-	+	+
48	Instyle 800	8,0 - 12,0	76,6	A	180	-	optional	-	55	130	+	-	-	-	-	-	-	+	+
48	Instyle 1000	9,0 - 13,0	77,7	A	180	-	optional	-	75	145	+	-	-	-	-	-	-	+	+
50	Prostyle 500	3,0 - 7,0	82,0	A+	150	-	optional	-	35	80	+	-	-	-	-	-	-	+	+
50	Prostyle 550	3,0 - 7,0	81,0	A+	150	-	optional	-	36	94	+	-	-	-	-	-	-	+	+
50	Prostyle 600	3,0 - 7,0	79,6	A	150	-	optional	-	42	120	+	-	-	-	-	-	-	+	+
50	Prostyle 650	3,0 - 9,0	80,5	A	150	-	optional	-	40	108	+	-	-	-	-	-	-	+	+
50	Prostyle 700	6,0 - 12,0	81,6	A+	180	-	optional	-	45	116	+	-	-	-	-	-	-	+	+
50	Prostyle 800	8,0 - 12,0	76,6	A	180	-	optional	-	55	130	+	-	-	-	-	-	-	+	+
50	Prostyle 1000	9,0 - 13,0	77,7	A	180	-	optional	-	75	145	+	-	-	-	-	-	-	+	+
Front fires, with ventilating fan																			
52	Instyle 600V Next	3,0 - 7,0	79,6	A	150	-	optional	-	42	98	+	-	-	-	-	-	-	+	-
52	Instyle 700V Next	6,0 - 12,0	81,6	A+	180	-	optional	-	45	120	+	-	-	-	-	-	-	+	-
52	Instyle 800V Next	8,0 - 12,0	76,6	A	180	-	optional	-	55	130	+	-	-	-	-	-	-	+	-
Tunnel fires																			
54	Instyle Tunnel 700	9,0 - 12,0	83,0	A+	180	-	optional	including	52	140	+	-	-	-	-	-	-	+	+
54	Prostyle Tunnel 700	9,0 - 12,0	83,0	A+	180	-	optional	-	52	140	+	-	-	-	-	-	-	+	+
2-Sided fires																			
56	Instyle Corner Slim 660/495	4,0 - 10,0	75,2	A	150 ¹⁾	-	optional	including	50	110	+	-	-	-	-	-	-	+	+
56	Instyle Corner Slim 660/570	5,0 - 10,0	80,0	A	180	-	optional	including	50	120	+	-	+	-	-	-	-	+	+
58	Instyle Corner 660 Low	4,0 - 9,0	76,3	A	150	-	including	-	50	105	+	-	-	-	-	-	-	+	+
58	Instyle Corner 660 High	4,0 - 9,0	76,3	A	150	-	including	-	50	105	+	-	-	-	-	-	-	+	+
3-Sided fires																			
59	Instyle Triple 660 Low	4,0 - 9,0	76,3	A	150	-	optional	including	50	100	+	-	+	-	-	-	-	+	+
Central heating fires																			
62	Ivar 10 H2O, Store	8,0 - 12,0	81,5	A+	150	-	optional	including	50	225	+	-	+	-	-	+	-	-	-

¹⁾ Multi-fuel kit available for burning multi-fuel/coal.

²⁾ SlideConnect® = variable connection to the flue (can be shifted to 4 cm).

³⁾ Defra approved = approved to use in smoke controlled areas.



Dealer

 **Dik Geurts**
Creation of flames

DRU Verwarming B.V.
P.O. Box 1021, 6920 BA Duiven
Ratio 8, 6921 RW Duiven
The Netherlands

T. +31 (0)26 - 319 5 319
www.dikgeurts.com

Drugasar Ltd.
Deans Road, Swinton
Manchester, M27 0JH
United Kingdom

T. +44 (0)161 - 793 8700
www.dikgeurts.co.uk

DRU Belgium
Kontichsesteenweg 69/1
2630 Aartselaar
Belgium

T. +32 (0)3 - 450 7000
www.dikgeurts.be



Dik Geurts is a trademark of DRU Verwarming B.V. Subject to changes. The colours in this brochure may vary from the actual products. Nothing in this publication may be used without prior written consent from DRU Verwarming B.V.

since
1754



BY APPOINTMENT OF
THE COURT OF THE NETHERLANDS

Art.993476 | 2025-03

SOCIAL MEDIA: For more inspiration and information, visit one of our social media channels or scan the QR code.

